


Art.Nr.: 120140750089
EAN: 4260374015055


OfficeLUX KAPTEYN



LIGHT DISTRIBUTION CURVE

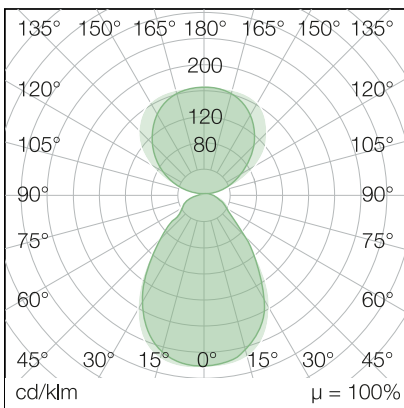

TECHNICAL DRAWING



LIGHT INFORMATION

beam angle	110° ↑ 90° ↓
color temperature	4.000 K
color tolerance	< 3 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	No
connection	Cable: 3 x 1,5 mm ² , 1,4 m
power factor	> 0.90
module per circuit breaker B10A	6
module per circuit breaker B16A	10
module per circuit breaker C10A	10
module per circuit breaker C16A	17
switching cycles	> 500.000
voltage range AC	200 – 240 V AC, 50/60Hz

ORDER OVERVIEW

OfficeLUX KAPTEYN	
product code	120140750089
EAN code	4260374015055
warranty	5 years

ACCESSORIES

No accessories available

PERFORMANCE

luminous efficiency	96 lm/W
system performance	75 W
luminous flux	3.600 lm ↑ 3.600 lm ↓
dimnable	Touchpanel

RESILIENCE

protection class	I
impact resistance	IK04
protection type	IP20
lifespan	> 50.000 h [L80, B10]
UV resistant	No
operating temperature	-20 to +45 °C
foodready	No

MATERIAL

cover	Prismatic cover
material (cover)	PC
material (housing)	Aluminium
housing color	Silver

SCOPE OF DELIVERY

no accessory included

DIMENSION

L x W x H / Ø (H2)	692 x 1.955 x 310 mm
weight	14,1 kg