





Art.Nr.: 120340580087
EAN: 4260374015031

OfficeLUX SOLEE



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

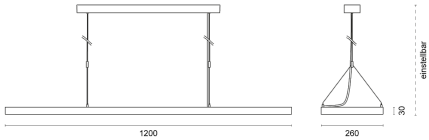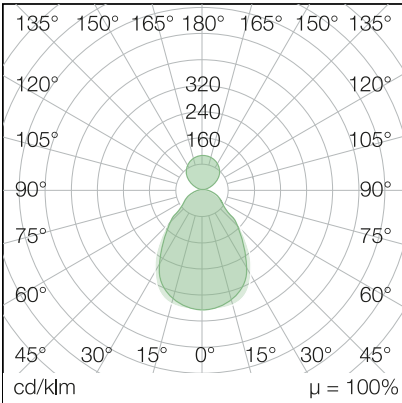

LIGHT INFORMATION

| | |
|-----------------------|--------------|
| beam angle | 110° ↑ 90° ↓ |
| color temperature | 4.000 K |
| color tolerance | < 3 SDCM |
| color rendering index | > 80 |

PROPERTIES

| | |
|---------------------------------|---|
| through-wiring | 5 x 0,75 mm ² |
| connection | Terminal: 5-pole max. 2,5 mm ² |
| power factor | > 0.90 |
| module per circuit breaker B10A | 34 |
| module per circuit breaker B16A | 54 |
| module per circuit breaker C10A | 34 |
| module per circuit breaker C16A | 54 |
| switching cycles | > 500.000 |
| voltage range AC | 200 – 240 V AC, 50/60Hz |

ORDER OVERVIEW

| | |
|-----------------|---------------|
| OfficeLUX SOLEE | |
| product code | 120340580087 |
| EAN code | 4260374015031 |
| warranty | 5 years |

ACCESSORIES

| |
|--------------------------|
| No accessories available |
|--------------------------|

PERFORMANCE

| | |
|---------------------|---------------------|
| luminous efficiency | 81 lm/W |
| system performance | 58 W |
| luminous flux | 700 lm ↑ 4.000 lm ↓ |
| dimnable | Dip switch I DALI |

RESILIENCE

| | |
|-----------------------|-----------------------|
| protection class | I |
| impact resistance | IK04 |
| protection type | IP20 |
| lifespan | > 50.000 h [L80, B10] |
| UV resistant | No |
| operating temperature | -20 to +45 °C |
| foodready | No |

MATERIAL

| | |
|--------------------|-----------------|
| cover | Prismatic cover |
| material (cover) | PC |
| material (housing) | Aluminium |
| housing color | Silver |

SCOPE OF DELIVERY

| |
|--|
| includes cord suspension and mounting material |
|--|

DIMENSION

| | |
|--------------------|--------------------------|
| L x W x H / Ø (H2) | 1.200 x 260 x 30 (64) mm |
| weight | 5,7 kg |