


OfficeLUX SORA

Art.Nr.: 120340580088
EAN: 4260374015048



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

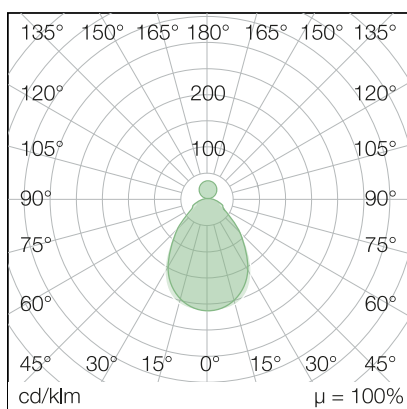

LIGHT INFORMATION

beam angle	110° ↑ 90° ↓
color temperature	4.000 K
color tolerance	< 3 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	5 x 0,75 mm ²
connection	Terminal: 5-pole max. 2,5 mm ²
power factor	> 0.90
module per circuit breaker B10A	34
module per circuit breaker B16A	54
module per circuit breaker C10A	34
module per circuit breaker C16A	54
switching cycles	> 500.000
voltage range AC	200 – 240 V AC, 50/60Hz

ORDER OVERVIEW

OfficeLUX SORA	
product code	120340580088
EAN code	4260374015048
warranty	5 years

ACCESSORIES

No accessories available

PERFORMANCE

luminous efficiency	100 lm/W
system performance	58 W
luminous flux	1.900 lm ↑ 3.900 lm ↓
dimnable	Dip switch I DALI

RESILIENCE

protection class	I
impact resistance	IK04
protection type	IP20
lifespan	> 50.000 h [L80, B10]
UV resistant	No
operating temperature	-20 to +45 °C
foodready	No

MATERIAL

cover	Prismatic cover
material (cover)	PC
material (housing)	Aluminium
housing color	Silver

SCOPE OF DELIVERY

includes mounting material

DIMENSION

L x W x H / Ø (H2)	1.200 x 260 x 30 mm
weight	5,5 kg