



PanelLUX
SLIM
LONG PLUS UGR I 4.000 K

Art.Nr.: 626240350018
EAN: 4260374015840



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

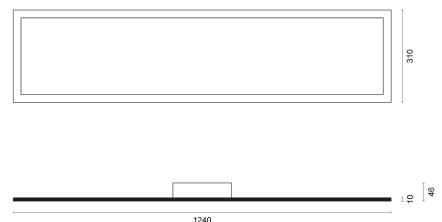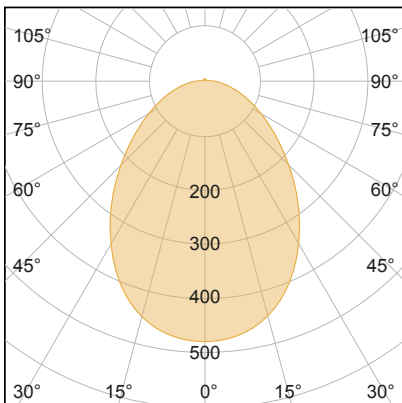

LIGHT INFORMATION

beam angle	100°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	According to power supply
connection	According to power supply
power factor	> 0.95
module per circuit breaker B10A	3
module per circuit breaker B16A	6
module per circuit breaker C10A	6
module per circuit breaker C16A	10
switching cycles	> 500.000
voltage range AC	Je nach VSG

ORDER OVERVIEW

PanelLUX SLIM LONG PLUS UGR I 4.000 K	
product code	626240350018
EAN code	4260374015840
warranty	4 years

ACCESSORIES

Power supply for PanelLUX SLIM LONG PLUS (PLXP-35S)

PERFORMANCE

luminous efficiency	111 lm/W
system performance	35 W
luminous flux	3.900 lm
dimnable	According to power supply

RESILIENCE

protection class	III
impact resistance	IK04
protection type	IP20
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	-25 to +45 °C
foodready	No

MATERIAL

cover	Prismatic cover
material (cover)	PMMA
material (housing)	Aluminium
housing color	White

SCOPE OF DELIVERY

several power supply options available (not included)

DIMENSION

L x W x H / Ø (H2)	1.240 x 310 x 10 (46) mm
weight	3,0 kg