


PanelLUX SLIM LONG


Art.Nr.: 626240380012
EAN: 4260374014690



LIGHT DISTRIBUTION CURVE

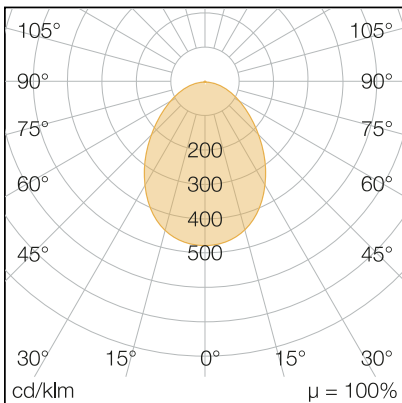

TECHNICAL DRAWING

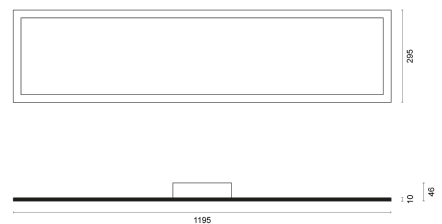

LIGHT INFORMATION

beam angle	80°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

PROPERTIES

through-wiring	According to power supply
connection	According to power supply
power factor	> 0.95
module per circuit breaker B10A	52
module per circuit breaker B16A	83
module per circuit breaker C10A	52
module per circuit breaker C16A	83
switching cycles	> 500.000
voltage range AC	Je nach VSG

ORDER OVERVIEW

PanelLUX LONG	
product code	626240380012
EAN code	4260374014690
warranty	4 years

ACCESSORIES

Power supply for PanelLUX LONG (PLX-38S)
Power supply for PanelLUX LONG (PLX-38S-DA)
Cord suspension for PanelLUX SQUARE/LONG

PERFORMANCE

luminous efficiency	126 lm/W
system performance	38 W
luminous flux	4.800 lm
dimnable	According to power supply

RESILIENCE

protection class	III
impact resistance	IK07
protection type	IP20
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	-25 to +45 °C
foodready	No

MATERIAL

cover	Prismatic cover
material (cover)	PS
material (housing)	Aluminium
housing color	White

SCOPE OF DELIVERY

several power supply options available (not included)

DIMENSION

L x W x H / Ø (H2)	1.195 x 295 x 10 (46) mm
weight	3,0 kg