



PanelLUX  
**SLIM**  
UGR I 4.000 K

Art.Nr.: 626240380011  
EAN: 4260374014683



LIGHT DISTRIBUTION CURVE

TECHNICAL DRAWING

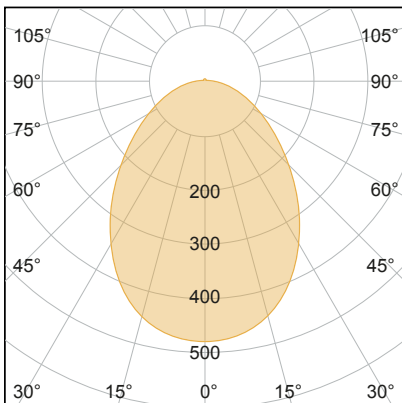

## LIGHT INFORMATION

beam angle	100°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 80

## PROPERTIES

through-wiring	According to power supply
connection	According to power supply
power factor	> 0.95
module per circuit breaker B10A	52
module per circuit breaker B16A	83
module per circuit breaker C10A	52
module per circuit breaker C16A	83
switching cycles	> 500.000
voltage range AC	Je nach VSG

## ORDER OVERVIEW

PanelLUX SLIM UGR I 4.000 K	
product code	626240380011
EAN code	4260374014683
warranty	4 years

## ACCESSORIES

Power supply for PanelLUX LONG (PLX-38S)
Power supply for PanelLUX LONG (PLX-38S-DA)
Power supply for PanelLUX SLIM/SLIM LONG
Cord suspension for PanelLUX SQUARE/LONG
Surface mounting frame for PanelLUX SLIM
Flush mounting frame for PanelLUX SQUARE

## PERFORMANCE

luminous efficiency	103 lm/W
system performance	38 W
luminous flux	3.900 lm
dimnable	According to power supply

## RESILIENCE

protection class	III
impact resistance	IK04
protection type	IP20
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	-25 to +45 °C
foodready	No

## MATERIAL

cover	Prismatic cover
material (cover)	PMMA
material (housing)	Aluminium
housing color	White

## SCOPE OF DELIVERY

several power supply options available (not included)

## DIMENSION

L x W x H / Ø (H2)	620 x 620 x 10 (46) mm
weight	3,0 kg