




Art.Nr.: 497540140127  
EAN: 4260374016687

# RoadLUX PRO


140 | 75 x 150°



## LIGHT DISTRIBUTION CURVE

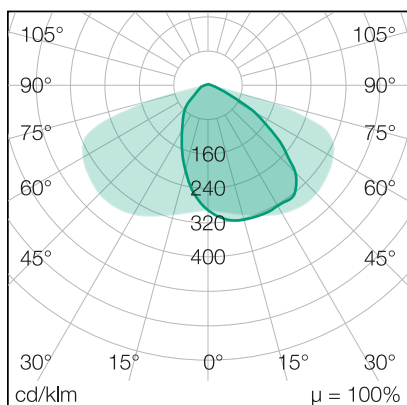

## TECHNICAL DRAWING



## LIGHT INFORMATION

beam angle	75 x 150°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 70

## PROPERTIES

through-wiring	No
connection	Terminal: 3-pole max. 2,5 mm <sup>2</sup>
power factor	> 0.95
module per circuit breaker B10A	14
module per circuit breaker B16A	22
module per circuit breaker C10A	14
module per circuit breaker C16A	22
switching cycles	> 500.000
voltage range AC	200 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

RoadLUX PRO 140 I 75 x 150°	
product code	497540140127
EAN code	4260374016687
warranty	5 years

## ACCESSORIES

Adapter 76mm for RoadLUX PRO
Adapter 34mm for RoadLUX PRO
Wall bracket for RoadLUX PRO
Corner bracket for RoadLUX PRO
Double post-top bracket for RoadLUX PRO

## PERFORMANCE

luminous efficiency	140 lm/W
system performance	140 W
luminous flux	19.600 lm
dimnable	No

## RESILIENCE

protection class	I
impact resistance	IK08
protection type	IP66
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	-30 to +50 °C
foodready	No

## MATERIAL

cover	Transparent cover
material (cover)	Glass
material (housing)	Aluminium
housing color	Grey

## SCOPE OF DELIVERY

reducing adaptor for 42 mm; screws
------------------------------------

## DIMENSION

L x W x H / Ø (H2)	617 (763) x 352 x 115 (167) mm
weight	8,2 kg