



Art.Nr.: 496040030115  
EAN: 4260374016564


RoadLUX

**PRO**


30 | 60 x 150°



**LIGHT DISTRIBUTION CURVE**

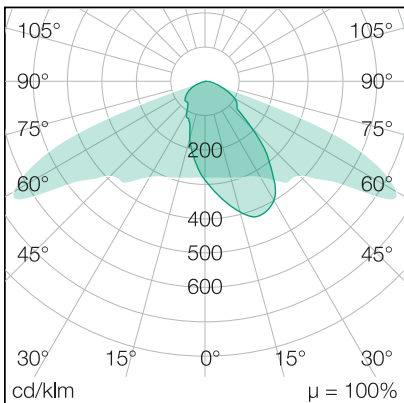

**TECHNICAL DRAWING**



## LIGHT INFORMATION

beam angle	60 x 150°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 70

## PROPERTIES

through-wiring	No
connection	Terminal: 3-pole max. 2,5 mm <sup>2</sup>
power factor	> 0.95
module per circuit breaker B10A	65
module per circuit breaker B16A	104
module per circuit breaker C10A	65
module per circuit breaker C16A	104
switching cycles	> 500.000
voltage range AC	200 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

RoadLUX PRO 30 I 60 x 150°	
product code	496040030115
EAN code	4260374016564
warranty	5 years

## ACCESSORIES

Adapter 76mm for RoadLUX PRO
Adapter 34mm for RoadLUX PRO
Wall bracket for RoadLUX PRO
Corner bracket for RoadLUX PRO
Double post-top bracket for RoadLUX PRO

## PERFORMANCE

luminous efficiency	133 lm/W
system performance	30 W
luminous flux	4.000 lm
dimnable	No

## RESILIENCE

protection class	I
impact resistance	IK08
protection type	IP66
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	-30 to +50 °C
foodready	No

## MATERIAL

cover	Transparent cover
material (cover)	Glass
material (housing)	Aluminium
housing color	Grey

## SCOPE OF DELIVERY

reducing adaptor for 42 mm; screws

## DIMENSION

L x W x H / Ø (H2)	533 (679) x 283 x 117 (160) mm
weight	5,8 kg