




Art.Nr.: 490140500007  
EAN: 4260374013372

# RoadLUX PRO


49 | 45 x 150°



## LIGHT DISTRIBUTION CURVE

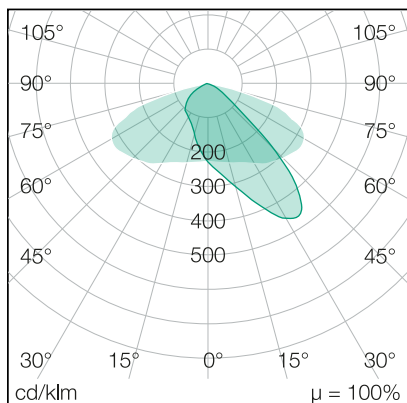

## TECHNICAL DRAWING

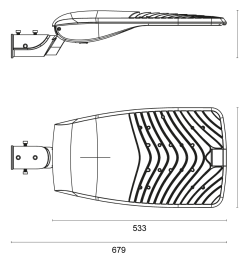

## LIGHT INFORMATION

beam angle	45 x 150°
color temperature	4.000 K
color tolerance	< 5 SDCM
color rendering index	> 70

## PROPERTIES

through-wiring	No
connection	Terminal: 3-pole max. 2,5 mm <sup>2</sup>
power factor	> 0.95
module per circuit breaker B10A	40
module per circuit breaker B16A	64
module per circuit breaker C10A	40
module per circuit breaker C16A	64
switching cycles	> 500.000
voltage range AC	200 – 240 V AC, 50/60 Hz

## ORDER OVERVIEW

RoadLUX PRO 49 I 45 x 150°	
product code	490140500007
EAN code	4260374013372
warranty	5 years

## ACCESSORIES

Adapter 76mm for RoadLUX PRO
Adapter 34mm for RoadLUX PRO
Wall bracket for RoadLUX PRO
Corner bracket for RoadLUX PRO
Double post-top bracket for RoadLUX PRO

## PERFORMANCE

luminous efficiency	132 lm/W
system performance	49 W
luminous flux	6.450 lm
dimnable	No

## RESILIENCE

protection class	I
impact resistance	IK08
protection type	IP66
lifespan	> 50.000 h [L80, B10]
UV resistant	Yes
operating temperature	-30 to +50 °C
foodready	No

## MATERIAL

cover	Transparent cover
material (cover)	Glass
material (housing)	Aluminium
housing color	Grey

## SCOPE OF DELIVERY

reducing adaptor for 42 mm; screws
------------------------------------

## DIMENSION

L x W x H / Ø (H2)	533 (679) x 283 x 117 (160) mm
weight	5,9 kg