

Basic



Hot rolled H-beams



welded H-beams



hollow sections



SIN-beams



Tapered H-beams



ADD inside beam



ADD outside beam



ADD endplates



ADD frame corner



ADD cleats



ADD hollow sections



ADD+WELD part2part



ADD angle



ADD prewelded T-parts



WELD single pass



WELD multi pass



WELD 2 x robot system = doublespeed



conti-production SBA




HEATING FUNCTION



PLASMA CUT FUNCTION

Option

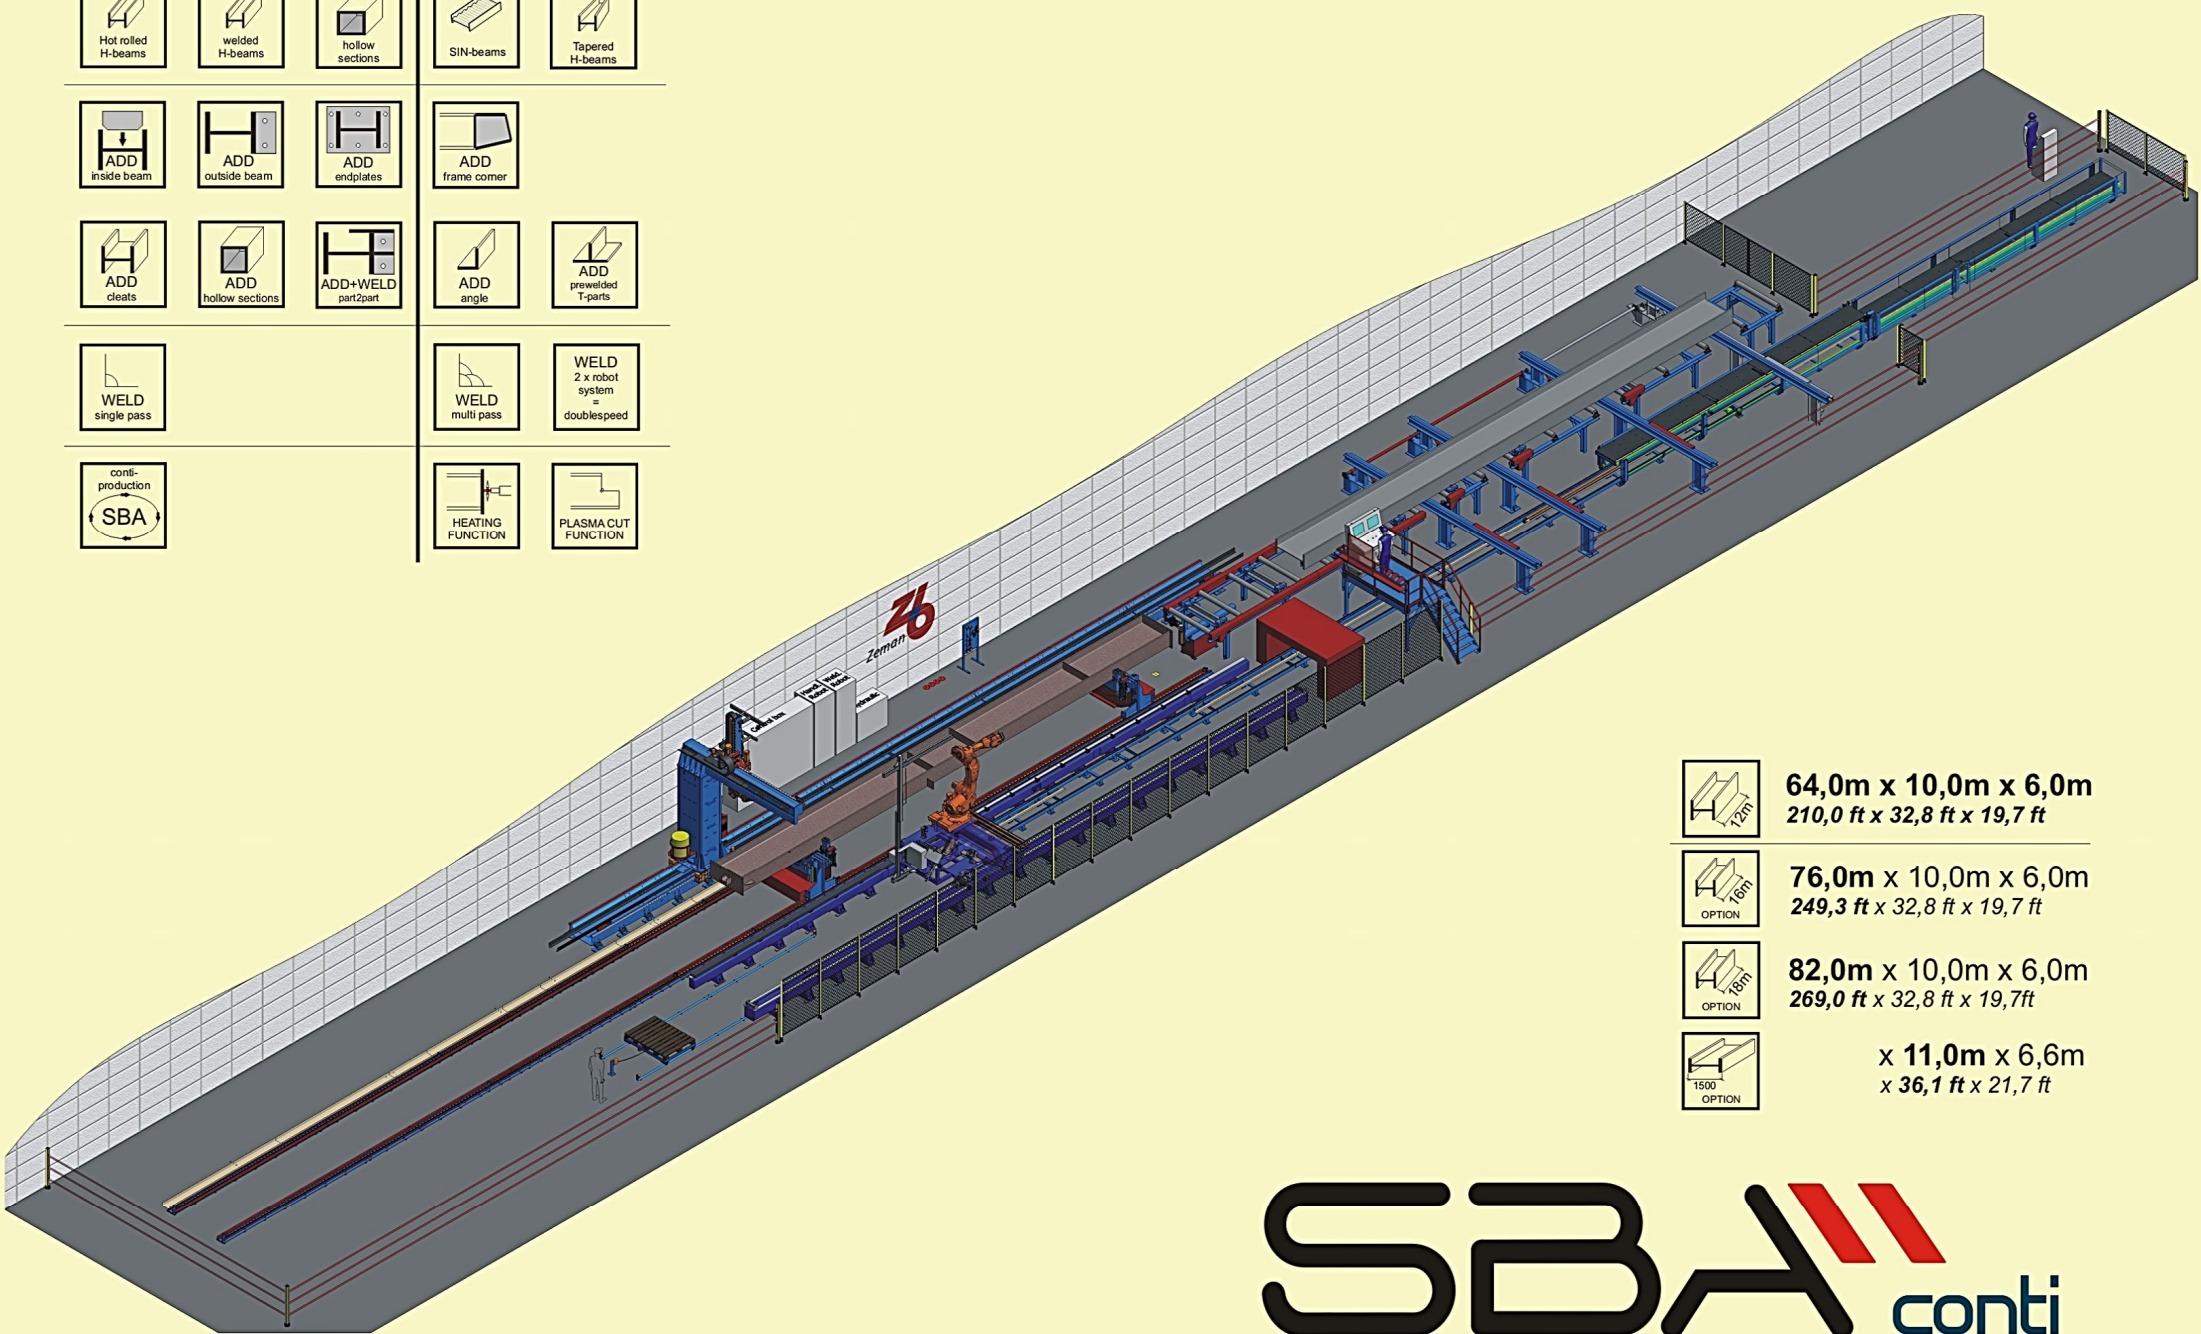

64,0m x 10,0m x 6,0m
210,0 ft x 32,8 ft x 19,7 ft



76,0m x 10,0m x 6,0m
249,3 ft x 32,8 ft x 19,7 ft



82,0m x 10,0m x 6,0m
269,0 ft x 32,8 ft x 19,7 ft



x 11,0m x 6,6m
x 36,1 ft x 21,7 ft

