



PRODUCTIVITY, MAXIMIZED

**3,000 – 7,000 LB. CAPACITY
INTERNAL COMBUSTION
PNEUMATIC TIRE LIFT TRUCKS**

2 PROVEN TO WORK HARDER

Experience A New Level Of Productivity



Give your business a lift in productivity – by 10% with the Cat® 3,000 - 7,000 lb. IC pneumatic tire lift truck series. Proven to move 10,400 more loads per year than the leading competition*, this series pushes through the hardest work days to help you move more – all day, every day.

ADVANTAGES TO YOU:

- 3,000 – 7,000 lb. lift capacities
- Excellent travel speeds and powerful acceleration for greater productivity
- Superior lift and lower speeds result in lower cycle times
- Emission levels measure well below Environmental Protection Agency (EPA) Tier 4 final requirements
- World-class service and support provided by the best dealer network in the industry

KEY APPLICATIONS:

- Building materials and garden supplies
- Chemicals and allied products
- Fabricated metal
- Industrial machinery and equipment
- Lumber and wood
- Primary metal
- Stone, clay and glass
- Wholesale trade durable goods

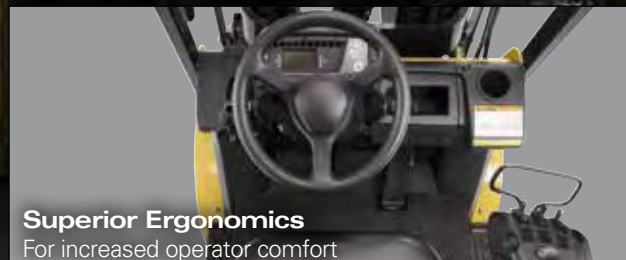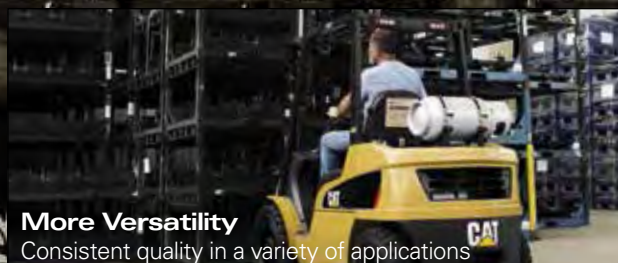

*Based on cycle testing in which this model completed four more cycles per hour than the leading competitors. Assuming 10-hour shifts, five-day work weeks and a 52-week year, these results can be calculated to exceed 10,400 more cycles than the leading competition in a given year.



HIGH PERFORMING, DURABLE AND

To Keep Your Business Moving

The Cat pneumatic tire lift truck series is built to meet your business' every need.



GREATER RELIABILITY, MAXIMUM UPTIME

- Corrugated Fin Radiator** – The cooling system in this series is equipped with an aluminum core corrugated fin radiator that resists corrosion and more efficiently transfers heat. The result is a cooler running truck for greater reliability and longer run times.
- Cyclone Air Filter and High Position Air Intake** – The air intake system draws from higher levels where contamination is less likely, while the air filter reduces the risk of dirt entering the engine compartment and contaminating the engine oil. In addition to minimizing the risk of mechanical failure, this results in:
 - Reduced NOx emissions and particulate matter or soot
 - Lower fuel consumption
 - Increased power output
- Engine Protection System** – Display-based indicators immediately notify the operator when vital fluids are low or engine maintenance is required, resulting in greater uptime while helping to prevent more costly maintenance.
- Underbelly Screen** – Easily installed as an added protection from dirt and debris, the underbelly screen protects the truck's fan guard blades and bearings to keep the truck running at peak performance. It also offers quick access for oil changes and regular maintenance.
- Durable Mast** – Narrow flanges and 45° canted hoses and chains enhance visibility through the mast while the deep webs and six load rollers offer added strength and rigidity. Two contact points between the channels and the load rollers increase the mast's ability to handle side thrust forces while the side thrust rollers help maintain alignment.

RELIABLE.



DIESEL ENGINE – NOW TIER 4 FINAL COMPLIANT

The new 4EG 3.3L diesel engine is built with cutting-edge emissions technologies to meet the EPA's Tier 4 final requirements, while still maintaining the high levels of productivity that your business demands.

- **A high-pressure common rail fuel injection system** – ensures the diesel burns cleanly with optimum power output.
- **Exhaust gas recirculation system** – sends the exhaust gas back through the system after cooling to limit harmful emissions.

A STEP UP IN PRODUCTIVITY

This series reaches top speeds up to 7.5% faster on a 10% grade than the leading competition.



INCREASED PERFORMANCE

- **Fuel Saver Mode** – Controlled by a toggle switch on the dash, this feature helps reduce overall fuel consumption and the risk of premature tire wear. The result? Up to 14% more fuel efficiency without affecting the top speed of the truck.*
- **Single Speed Powershift Automatic Transmission** – The torque converter of the transmission is precisely matched to the engine to provide high levels of torque to power the truck, while offering a smoother ride.

DURABILITY OPTIONS

- **Service Indicator Package** – An air service cleaner indicator and radiator coolant warning light are included on the premium LED/LCD display panel to keep the operator informed of service needs.
- **Engine Shutdown System** – This system monitors the engine oil pressure and transmission and coolant temperatures. The lift truck will slow down or shut off if this system recognizes unsafe conditions.

* Fuel efficiency increase shown against previous model in preliminary testing. Levels may vary based on application.

MOVE 10,400 MORE LOADS

This Cat series delivers a 10% increase in productivity every shift.

BIG ON COMFORT

Designed For Optimum Control

The Cat GP15N/DP20N series is equipped with key features to help keep your operators alert and confident throughout the workday. Premium ergonomics and a smooth ride all come together to help your business achieve maximum productivity - all day, every day.

INCREASED AWARENESS

- **Optimized Visibility** – Narrow mast channels provide all-around visibility and clear sight lines to the surrounding job site, while the overhead guard and slim profile of the mast offer greater visibility when driving and lifting.
- **Forward LED Work Lights** – The LED work lights, mounted on the overhead guard, have a longer life, minimize glare and are cooler than traditional bulbs – all features that lower the cost of ownership while improving operator productivity.
- **Electronic Backup Alarm** – This series is equipped with an audible backup alarm. The alarm sounds anytime the truck is in reverse, alerting pedestrians and other operators working nearby.
- **Premium Working Light Package (Optional)** – Includes rearview mirror kit, rear LED working light and rear LED stop tail / backup combination lights to help keep the operator and others in the work area aware of the lift truck and its movements.



GROUND SPEED CONTROL


Software and sensors limit the maximum travel speed of the truck without limiting its performance. See your local Cat lift truck dealer for flexibility in adjusting the speed in applications requiring stricter policies.


PRESENCE DETECTION SYSTEM (PDS)

The Presence Detection System (PDS) activates whenever the operator does not fasten the seat belt during operation or leaves the normal operating position without activating the parking brake. This integral computer-based feedback system uses both audible and visual indicators to alert the operator to potentially hazardous situations, while increasing operator awareness.

Key features:

- When the operator is not in the normal operating position, the PDS electronically discontinues powered-travel movement and activation of load-handling functions.
- When an operator is in the normal operating position, but the seat belt is not buckled, an audible warning will sound and a visible indicator will appear, alerting the operator.

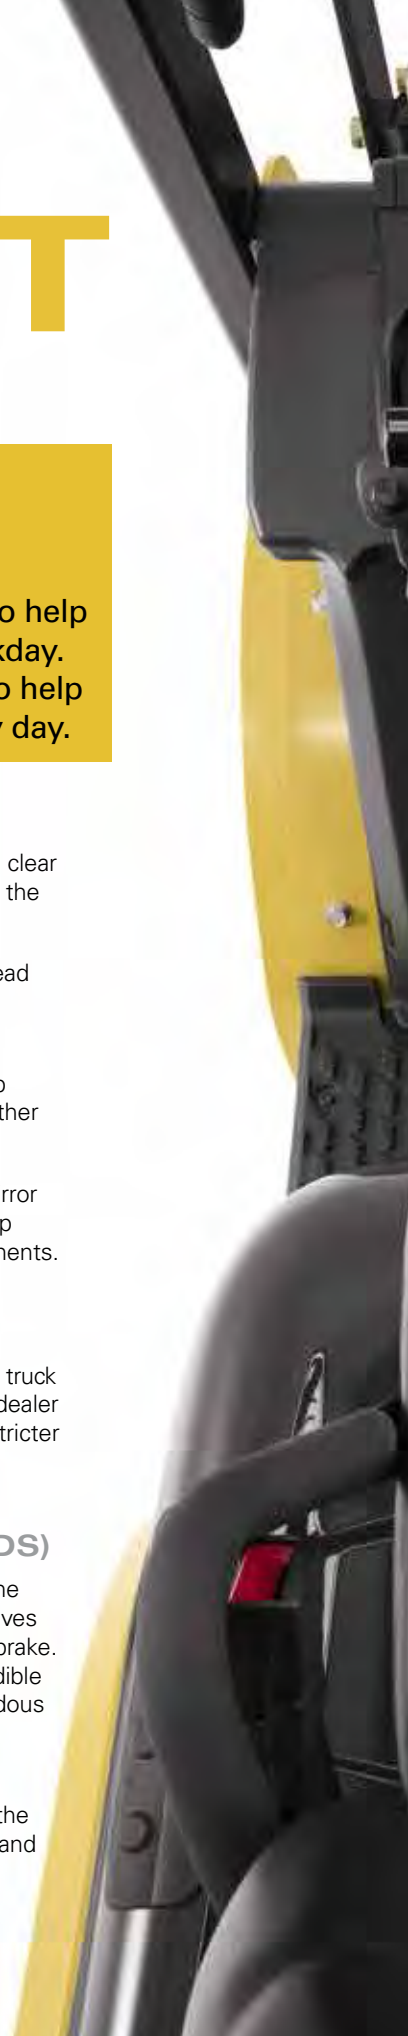

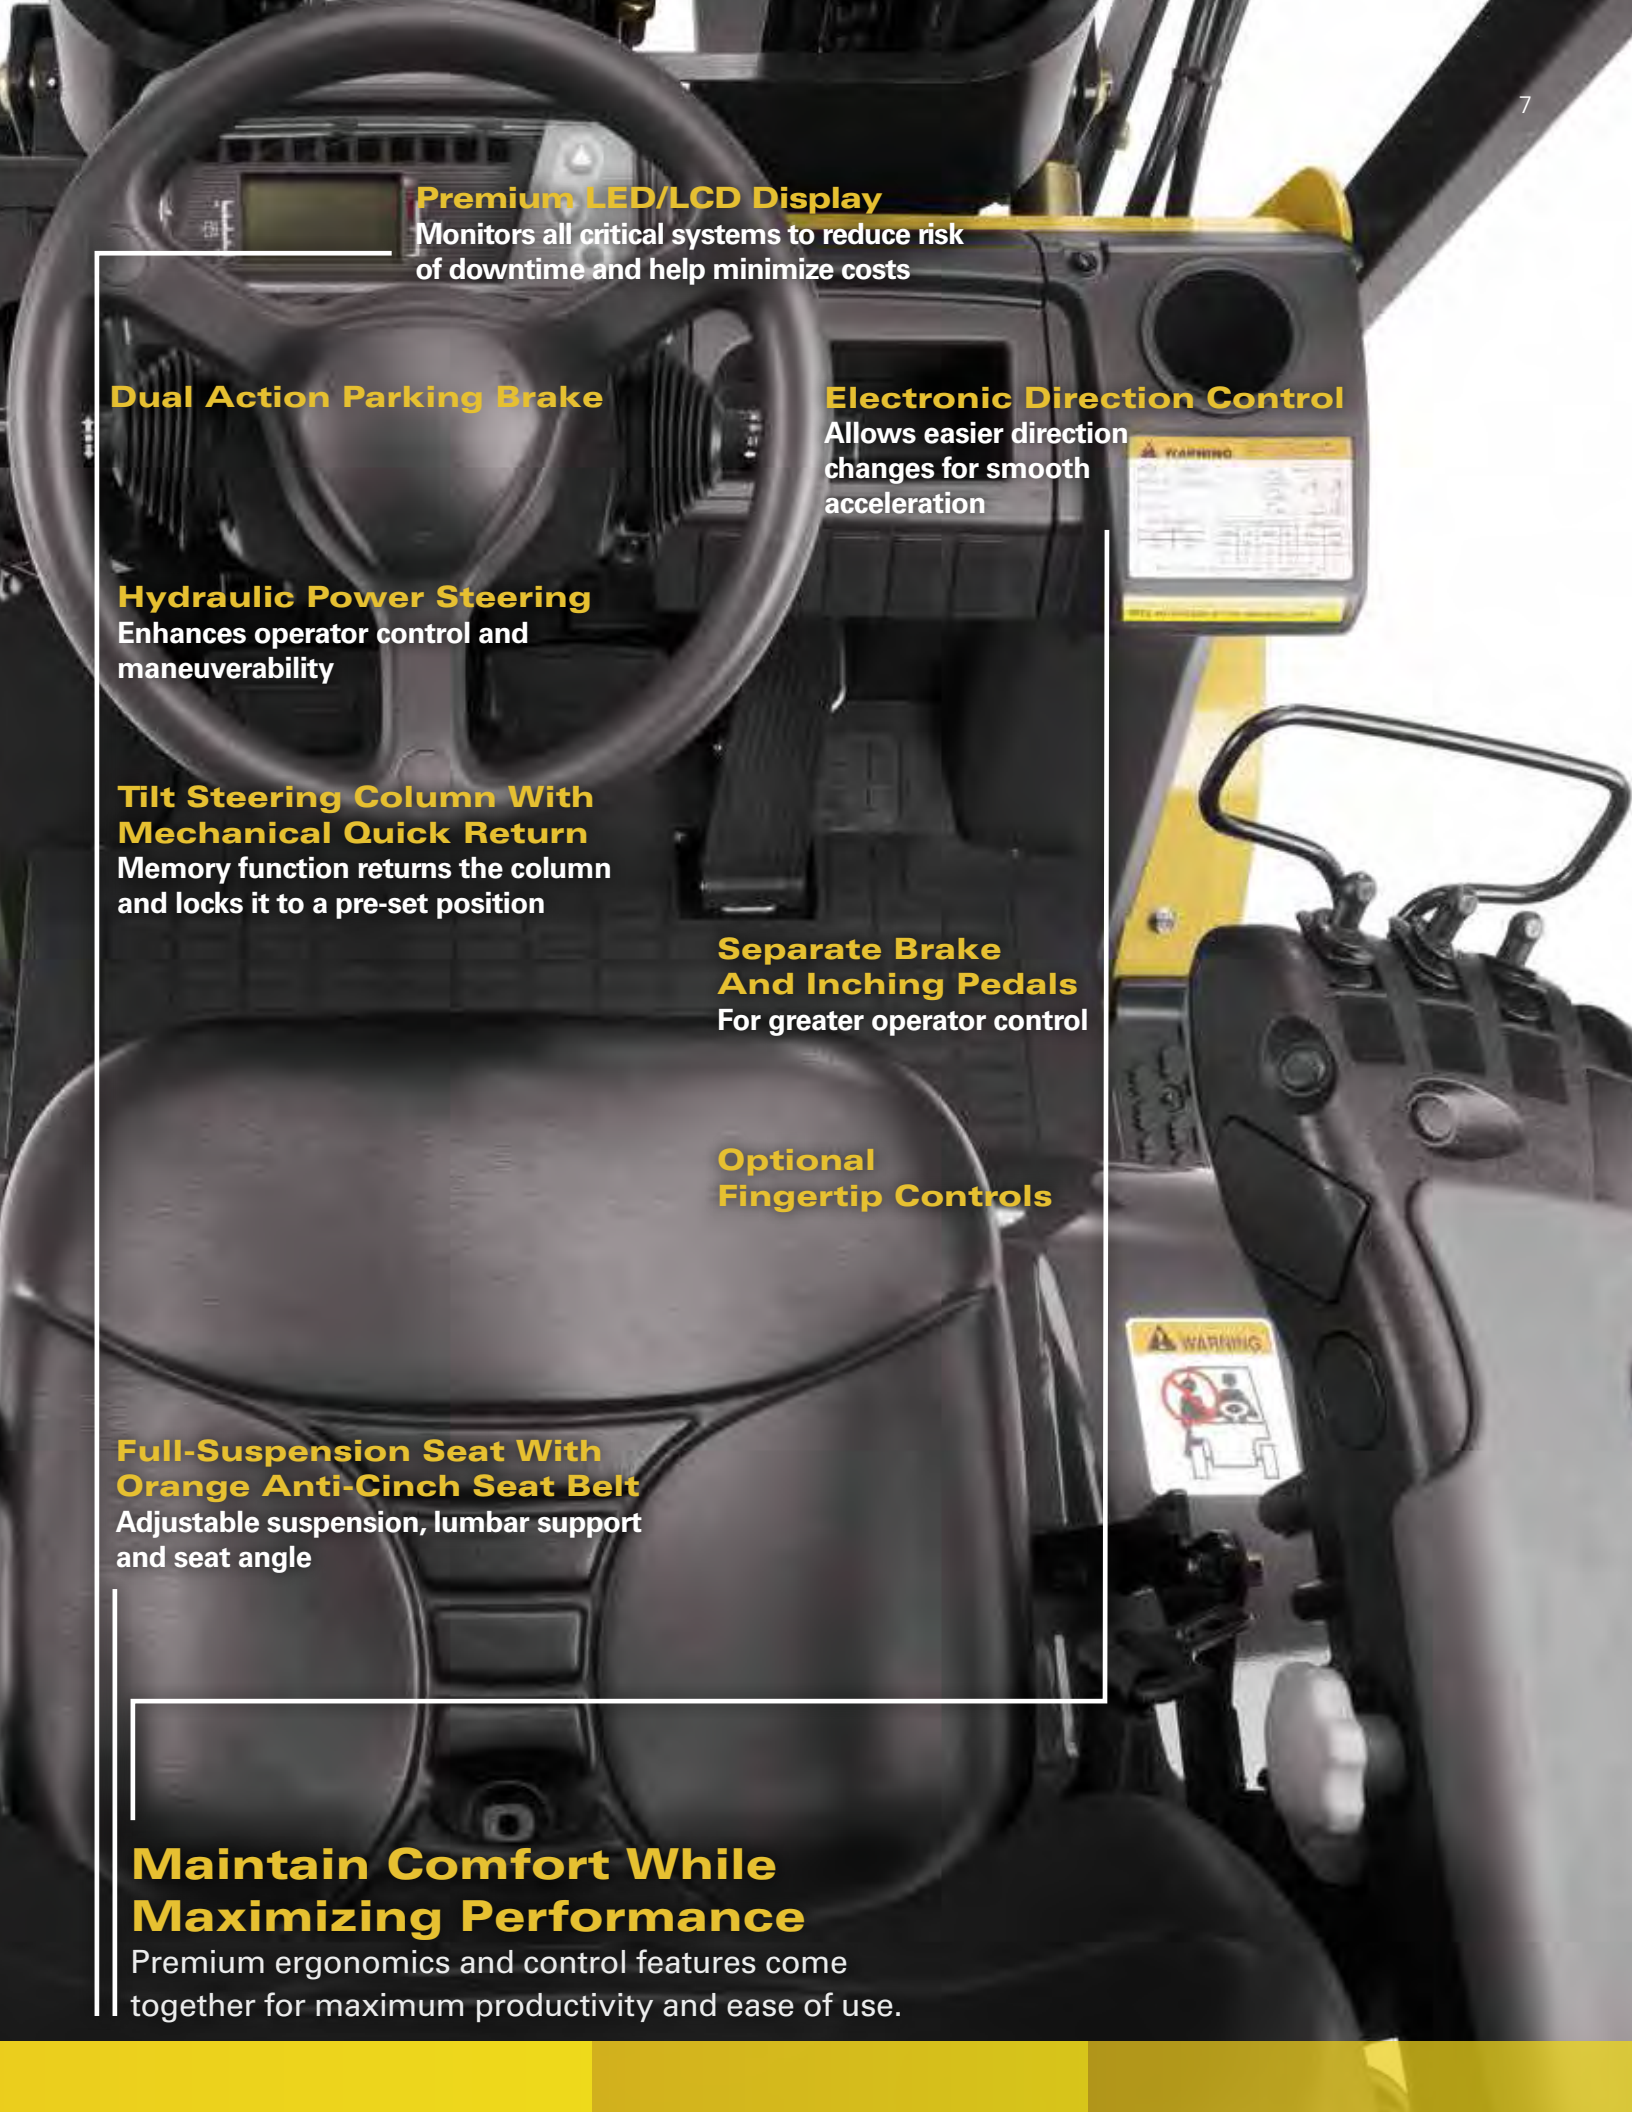

Premium LED/LCD Display

Monitors all critical systems to reduce risk of downtime and help minimize costs

Dual Action Parking Brake

Hydraulic Power Steering

Enhances operator control and maneuverability

Tilt Steering Column With Mechanical Quick Return

Memory function returns the column and locks it to a pre-set position

Electronic Direction Control

Allows easier direction changes for smooth acceleration

Separate Brake And Inching Pedals

For greater operator control

Optional Fingertip Controls

Full-Suspension Seat With Orange Anti-Cinch Seat Belt

Adjustable suspension, lumbar support and seat angle

Maintain Comfort While Maximizing Performance

Premium ergonomics and control features come together for maximum productivity and ease of use.



Local service and support



Genuine OEM parts



Custom financing packages

MORE CONFIDENCE





Factory warranty for added protection



Local Support You Can Count On

A Cat lift truck purchase connects you to a variety of material handling solutions, including world-class service and support from your local, trusted dealer. With trained service technicians, a diverse parts inventory and a broad selection of service options, your local dealer can help you lower costs, enhance productivity and more efficiently manage your business.

FINANCING MADE SIMPLE

Financing your next Cat lift truck is easy with our wide range of flexible leasing and purchasing options. Whether you want to finance or lease, your local Cat lift truck dealer can help customize a package for your business.

WHEN EVERY PART COUNTS

When buying from your local Cat lift truck dealer, you can rest assured that your genuine OEM parts are manufactured to meet original equipment criteria. Additionally, all Cat lift trucks OEM parts come with a six-month, unlimited-hours warranty.

When speed is critical, our Parts Fast Or Parts Free Guarantee* ensures next-business-day delivery of all Cat lift trucks parts, or they're free, including freight. If your part doesn't come in by the next business day, we pay for it.

STANDING BEHIND OUR PRODUCTS

We deliver peace of mind by helping your lift trucks stay on the job. Every new Cat lift truck is covered by a 1-year / 2,000-hours warranty that includes parts and labor, as well as components and systems. With our standard 2-year / 4,000-hours extended powertrain warranty, you'll have the confidence that only comes from owning a Cat lift truck.

* At dealer's location.

† Programs may be subject to change without notice and may vary by region.
Please ask your local Cat lift truck dealer for complete terms and conditions.

Specifications

Characteristics				GP15N		GP18N		GP20CN	
1	Capacity at rated load center	lb	kg	3,000	1,500	3,500	1,750	4,000	2,000
2	Capacity at load center – distance	in	mm	24	500	24	500	24	500
3	Power – electric, diesel, gasoline or LP gas			gasoline/LPG		gasoline/LPG		gasoline/LPG	
4	Tire type – cushion or pneumatic			pneumatic		pneumatic		pneumatic	
5	Wheels (x=driven) – number front / rear			2x / 2		2x / 2		2x / 2	
Dimensions				GP15N		GP18N		GP20CN	
6	Maximum fork height (top of fork) ¹⁾	in	mm	131	3,325	131	3,325	131	3,325
7	Free fork height ¹⁾	in	mm	4.5	115	4.5	115	4.7	120
8	Forks – thickness x length x width ¹⁾	in	mm	1.4x42.0x3.9	35x 1,070x 100	1.4x42.0x3.9	35x 1,070x 100	1.6x42.0x3.9	40x 1,070x 100
9	Fork spacing – out-to-out minimum / maximum	in	mm	7.9 / 36.2	200 / 920	7.9 / 36.2	200 / 920	7.9 / 36.2	200 / 920
10	Tilt – forward / backward	deg		6° / 10°		6° / 10°		6° / 10°	
11	Length to fork face	in	mm	89.0	2,260	90.4	2,295	92.5	2,350
12	Width – with single drive tires	in	mm	41.9	1,065	41.9	1,065	41.9	1,065
13	Width – with dual drive tires			-	-	-	-	-	-
14	Height – with lowered mast ¹⁾	in	mm	84.5	2,140	84.5	2,140	84.5	2,140
15	Seat height to SIP	in	mm	44.4	1,127	44.4	1,127	44.4	1,127
16	Height – to top of overhead guard	in	mm	82.7	2,100	82.7	2,100	82.7	2,100
17	Height – with extended mast ¹⁾	in	mm	179	4,549	179	4,549	179	4,549
18	Minimum outside turning radius	in	mm	76.8	1,950	78.0	1,980	79.5	2,020
19	Load moment constant	in	mm	15.7	400	15.7	400	16.3	415
20	Minimum aisle – 90° stack – zero clearance without a load	in	mm	92.5	2,350	93.7	2,380	95.9	2,435
Performance				GP15N		GP18N		GP20CN	
21	Travel speed – loaded / empty	mph	km/h	10.9 / 11.8	17.5 / 19.0	10.9 / 11.8	17.5 / 19.0	11.2 / 11.5	18.0 / 18.5
22	Lift speed – loaded / empty	fpm	m/s	122 / 124	0.62 / 0.63	122 / 124	0.62 / 0.63	122 / 124	0.62 / 0.63
23	Lowering speed – loaded / empty	fpm	m/s	98.4 / 98.4	0.50 / 0.50	98.4 / 98.4	0.50 / 0.50	98.4 / 98.4	0.50 / 0.50
24	Drawbar pull – loaded at 1 mph (1.6 km)	lb	N	3,910	17,400	3,910	17,400	3,870	17,200
25	Drawbar pull – loaded maximum	lb	N	4,560	20,300	4,560	20,300	4,500	20,000
26	Gradeability – loaded at 1 mph (1.6 km)	%		39.0		39.0		38.0	
27	Gradeability – maximum loaded	%		63.0		55.0		46.0	
Weight				GP15N		GP18N		GP20CN	
28	Empty	lb	kg	5,650	2,560	6,070	2,750	6,750	3,040
29	Axle load – with rated load front / rear	lb	kg	7,710 / 940	3,620 / 440	8,460 / 1,110	3,980 / 520	9,370 / 1,380	4,390 / 650
30	Axle load – without load front / rear	lb	kg	2,490 / 3,160	1,130 / 1,430	2,370 / 3,700	1,080 / 1,670	2,390 / 4,360	1,080 / 1,960
Chassis				GP15N		GP18N		GP20CN	
31	Tire size – front, standard	in		6.5 x 10 - 10PR		6.5 x 10 - 10PR		6.5 x 10 / 5.0 Solid	
32	Tire size – optional duals	in		-		-		-	
33	Tire size – rear tires	in		5.0 x 8 - 10PR		5.0 x 8 - 10PR		5.0 x 8 / 3.0 Solid	
34	Wheelbase	in	mm	55.1	1,400	55.1	1,400	55.1	1,400
35	Tread width – front (standard / optional duals)	in	mm	35.0 / -	890 / -	35.0 / -	890 / -	35.0 / -	890 / -
36	Tread width – rear tires	in	mm	35.4	900	35.4	900	35.4	900
37	Ground clearance – at lowest point at mast	in	mm	4.3	110	4.3	110	4.3	110
38	Ground clearance – at center of wheelbase	in	mm	6.0	152	6.0	152	6.0	152
39	Service brake			foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic	
40	Parking brake			hand, mechanical		hand, mechanical		hand, mechanical	
Powertrain				GP15N		GP18N		GP20CN	
41	Engine model			K21E		K21E		K21E	
42	Engine – continuous output S.A.E. gross	HP	kW	53.0	39.6	53.0	39.6	53.0	39.6
43		at rpm		2,700		2,700		2,700	
44	Engine – maximum torque S.A.E. gross	lb-ft	N-m	110	149	110	149	110	149
45		at rpm		2,000		2,000		2,000	
46	Cylinder / displacement	cu in	L	4 / 126	4 / 2.1	4 / 126	4 / 2.1	4 / 126	4 / 2.1
47	Transmission – type			powershift		powershift		powershift	
48	Transmission – number of speeds forward / reverse			1 / 1		1 / 1		1 / 1	
49	Battery	volts		12		12		12	
50	Relief pressure for attachments	psi	bar	2,610	180	2,610	180	2,610	180
51	Noise level – mean value at operator's ear Leq	dB(A)		73.5		73.5		73.5	


1) Heights with listed forks on standard two-stage mast. Optional forks will change dimensions slightly.

GP20N		DP20N		GP25N		DP25N		GP28N		DP28N	
4,000	2,000	4,000	2,000	5,000	2,500	5,000	2,500	5,500	2,800	5,500	2,800
24	500	24	500	24	500	24	500	24	500	24	500
gasoline/LPG		diesel		gasoline/LPG		diesel		gasoline/LPG		diesel	
pneumatic		pneumatic		pneumatic		pneumatic		pneumatic		pneumatic	
2x / 2		2x / 2		2x / 2		2x / 2		2x / 2		2x / 2	
GP20N		DP20N		GP25N		DP25N		GP28N		DP28N	
131.5	3,340	131.5	3,340	131.5	3,340	131.5	3,340	130.5	3,315	130.5	3,315
5.5	140	5.5	140	5.5	140	5.5	140	5.7	145	5.7	145
1.6x42.0x3.9	40x 1,070x 100	1.6x42.0x3.9	40x 1,070x 100	1.6x42.0x3.9	40x 1,070x 100	1.6x42.0x3.9	40x 1,070x 100	1.8x42.0x4.9	45x 1,070x 125	1.8x42.0x4.9	45x 1,070x 125
8.7 / 39.4	220 / 1,000	8.7 / 39.4	220 / 1,000	8.7 / 39.4	220 / 1,000	8.7 / 39.4	220 / 1,000	9.8 / 39.4	250 / 1,000	9.8 / 39.4	250 / 1,000
6° / 10°		6° / 10°		6° / 10°		6° / 10°		6° / 10°		6° / 10°	
98.0	2,490	98.0	2,490	100	2,550	100	2,550	104	2,645	104	2,645
45.3	1,150	45.3	1,150	45.3	1,150	45.3	1,150	50.2	1,275	50.2	1,275
64.6	1,640	64.6	1,640	64.6	1,640	64.6	1,640	67.5	1,715	67.5	1,715
84.5	2,145	84.5	2,145	84.5	2,145	84.5	2,145	85.5	2,165	85.5	2,165
44.8	1,137	44.8	1,137	44.8	1,137	44.8	1,137	46.7	1,187	46.7	1,187
82.9	2,105	82.9	2,105	82.9	2,105	82.9	2,105	83.7	2,125	83.7	2,125
180	4,564	180	4,564	180	4,564	180	4,564	178.5	4,536	178.5	4,536
86.6	2,200	86.6	2,200	87.8	2,230	87.8	2,230	91.1	2,315	91.1	2,315
17.9	455	17.9	455	17.9	455	17.9	455	19.3	490	19.3	490
105	2,655	105	2,655	106	2,685	106	2,685	110	2,805	110	2,805
GP20N		DP20N		GP25N		DP25N		GP28N		DP28N	
10.6 / 11.5	170 / 18.5	10.3 / 11.2	16.5 / 18.0	10.6 / 11.5	170 / 18.5	10.3 / 10.9	16.5 / 17.5	10.6 / 11.2	170 / 18.0	9.9 / 10.9	16.0 / 17.5
124 / 128	0.63 / 0.65	120 / 126	0.61 / 0.64	124 / 128	0.63 / 0.65	120 / 126	0.61 / 0.64	98.4 / 102	0.50 / 0.52	96.5 / 100	0.49 / 0.51
98.4 / 98.4	0.50 / 0.50	98.4 / 98.4	0.50 / 0.50	98.4 / 98.4	0.50 / 0.50	98.4 / 98.4	0.50 / 0.50	98.4 / 98.4	0.50 / 0.50	98.4 / 98.4	0.50 / 0.50
4,920	21,900	3,960	17,600	4,900	21,800	3,960	17,600	4,990	22,200	3,960	17,600
5,640	25,100	4,520	20,100	5,670	25,200	4,520	20,100	5,800	25,800	4,540	20,200
39.0		36.0		40.0		31.0		36.0		28.0	
570		42.0		49.0		370		43.0		32.0	
GP20N		DP20N		GP25N		DP25N		GP28N		DP28N	
7,370	3,340	7,610	3,450	7,990	3,620	8,210	3,720	9,090	4,120	9,330	4,230
9,950 / 1,420	4,660 / 685	10,060 / 1,550	4,720 / 730	11,570 / 1,420	5,450 / 670	11,650 / 1,560	5,490 / 730	12,950 / 1,640	6,100 / 70	13,050 / 1,780	6,150 / 830
3,240 / 4,130	1,470 / 1,870	3,340 / 4,270	1,510 / 1,940	3,190 / 4,800	1,440 / 2,180	3,260 / 4,950	1,480 / 2,240	3,670 / 5,420	1,660 / 2,460	3,730 / 5,600	1,690 / 2,540
GP20N		DP20N		GP25N		DP25N		GP28N		DP28N	
70 x 12 - 12PR		70 x 12 - 12PR		70 x 12 - 12PR		70 x 12 - 12PR		28 x 9 x 15 - 12PR		28 x 9 x 15 - 12PR	
70 x 12 - 12PR		70 x 12 - 12PR		70 x 12 - 12PR		70 x 12 - 12PR		28 x 9 x 15 - 12PR		28 x 9 x 15 - 12PR	
6.0 x 9 - 10PR		6.0 x 9 - 10PR		6.0 x 9 - 10PR		6.0 x 9 - 10PR		6.5 x 10 - 10PR		6.5 x 10 - 10PR	
63.0	1,600	63.0	1,600	63.0	1,600	63.0	1,600	63.8	1,620	63.8	1,620
37.8 / 47.4	960 / 1,205	37.8 / 47.4	960 / 1,205	37.8 / 47.4	960 / 1,205	37.8 / 47.4	960 / 1,205	41.7 / 47.2	1,060 / 1,200	41.7 / 47.2	1,060 / 1,200
38.6	980	38.6	980	38.6	980	38.6	980	38.6	980	38.6	980
4.6	117	4.6	117	4.6	117	4.6	117	5.4	136	5.4	136
6.6	167	6.6	167	6.6	167	6.6	167	7.4	189	7.4	189
foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic	
hand, mechanical		hand, mechanical		hand, mechanical		hand, mechanical		hand, mechanical		hand, mechanical	
GP20N		DP20N		GP25N		DP25N		GP28N		DP28N	
K25E		4EG		K25E		4EG		K25E		4EG	
61.0	45.8	48.0	36.0	61.0	45.8	48.0	36.0	61.0	45.8	48.0	36.0
2,700		2,250		2,700		2,250		2,700		2,250	
129	175	131	177	129	175	131	177	129	175	131	177
1,600		1,800		1,600		1,800		1,600		1,800	
4 / 152	4 / 2.5	4 / 203	4 / 3.3	4 / 152	4 / 2.5	4 / 203	4 / 3.3	4 / 152	4 / 2.5	4 / 203	4 / 3.3
powershift		powershift		powershift		powershift		powershift		powershift	
1 / 1		1 / 1		1 / 1		1 / 1		1 / 1		1 / 1	
12		12		12		12		12		12	
2,610	180	2,610	180	2,610	180	2,610	180	2,610	180	2,610	180
76.5		75.5		76.5		75.5		76.5		75.5	

NOTE: These specifications assume the use of drive axles, tires and tilt angles specified. Any modification to specifications, or any other combination of specifications made after the shipment of the truck, requires prior written approval from Mitsubishi Caterpillar Forklift America Inc. (MCFA). (See ANSI/ITSDF B56.1.) Also be advised that overall operating visibility may be affected by the mast configuration and mast options of your truck. Therefore, you may need to add ancillary [auxiliary] devices or modify your operating practices. Consult your dealer for further information.

GP30N		DP30N		GP33N		DP33N		GP35N		DP35N	
6,000	3,000	6,000	3,000	6,500	3,300	6,500	3,300	7,000	3,500	7,000	3,500
24	500	24	500	24	500	24	500	24	500	24	500
gasoline/LPG		diesel		gasoline/LPG		diesel		gasoline/LPG		diesel	
pneumatic		pneumatic		pneumatic		pneumatic		pneumatic		pneumatic	
2x / 2		2x / 2		2x / 2		2x / 2		2x / 2		2x / 2	
GP30N		DP30N		GP33N		DP33N		GP35N		DP35N	
130.5	3,315	130.5	3,315	131.5	3,350	131.5	3,350	131.5	3,350	131.5	3,350
5.7	145	5.7	145	5.9	150	5.9	150	5.9	150	5.9	150
1.8x42.0x4.9	45x 1,070x 125	1.8x42.0x4.9	45x 1,070x 125	2.0x42.0x4.9	50x 1,070x 125	2.0x42.0x4.9	50x 1,070x 125	2.0x42.0x4.9	50x 1,070x 125	2.0x42.0x4.9	50x 1,070x 125
9.8 / 39.4	250 / 1,000	9.8 / 39.4	250 / 1,000	9.8 / 39.4	250 / 1,000	9.8 / 39.4	250 / 1,000	9.8 / 39.4	250 / 1,000	9.8 / 39.4	250 / 1,000
6° / 10°		6° / 10°		6° / 10°		6° / 10°		6° / 10°		6° / 10°	
107	2,720	107	2,720	108	2,750	108	2,750	110	2,790	110	2,790
50.2	1,275	50.2	1,275	50.2	1,275	50.2	1,275	50.8	1,290	50.8	1,290
67.5	1,715	67.5	1,715	67.5	1,715	67.5	1,715	67.5	1,715	67.5	1,715
85.5	2,165	85.5	2,165	90.5	2,299	90.5	2,299	90.5	2,299	90.5	2,299
46.7	1,187	46.7	1,187	46.7	1,187	46.7	1,187	46.7	1,187	46.7	1,187
83.7	2,125	83.7	2,125	83.7	2,125	83.7	2,125	84.3	2,140	84.3	2,140
178.5	4,536	178.5	4,536	180	4,566	180	4,566	180	4,566	180	4,566
93.7	2,380	93.7	2,380	95.7	2,430	95.7	2,430	96.1	2,440	96.1	2,440
19.3	490	19.3	490	19.3	490	19.3	490	19.5	495	19.5	495
113	2,870	113	2,870	115	2,920	115	2,920	116	2,935	116	2,935
GP30N		DP30N		GP33N		DP33N		GP35N		DP35N	
10.6 / 11.2	170 / 18.0	9.9 / 10.9	16.0 / 17.5	10.9 / 11.5	17.5 / 18.5	10.3 / 11.2	16.5 / 18.0	10.9 / 11.5	17.5 / 18.5	10.3 / 11.2	16.5 / 18.0
98.4 / 102	0.50 / 0.52	96.5 / 100	0.49 / 0.51	98.4 / 102	0.50 / 0.52	96.5 / 100	0.49 / 0.51	82.7 / 86.6	0.42 / 0.44	80.7 / 84.6	0.41 / 0.43
98.4 / 98.4	0.50 / 0.50	98.4 / 98.4	0.50 / 0.50	98.4 / 98.4	0.50 / 0.50	98.4 / 98.4	0.50 / 0.50	98.4 / 98.4	0.50 / 0.50	98.4 / 98.4	0.50 / 0.50
4,990	22,200	3,960	17,600	4,610	20,500	3,620	16,100	4,610	20,500	3,620	16,100
5,800	25,800	4,540	20,200	5,310	23,600	4,140	18,400	5,310	23,600	4,140	18,400
34.0		26.0		29.0		22.0		27.0		21.0	
41.0		30.0		33.0		25.0		32.0		24.0	
GP30N		DP30N		GP33N		DP33N		GP35N		DP35N	
9,400	4,260	9,640	4,370	10,150	4,600	10,390	4,710	10,340	4,690	10,590	4,800
13,790 / 1,610	6,390 / 870	13,890 / 1,750	6,550 / 820	14,590 / 2,060	6,880 / 970	14,700 / 2,190	6,920 / 1,040	15,400 / 1,990	7,250 / 940	15,500 / 2,130	7,300 / 1,000
3,860 / 5,540	1,700 / 2,560	3,920 / 5,720	1,770 / 2,600	3,790 / 6,360	1,710 / 2,890	3,890 / 6,500	1,760 / 2,950	3,700 / 6,640	1,680 / 3,010	3,820 / 6,770	1,730 / 3,070
GP30N		DP30N		GP33N		DP33N		GP35N		DP35N	
28 x 9 x 15 - 12PR		28 x 9 x 15 - 12PR		250 x 15 - 16PR		250 x 15 - 16PR		250 x 15 - 16PR		250 x 15 - 16PR	
28 x 9 x 15 - 12PR		28 x 9 x 15 - 12PR		28 x 9 x 15 - 12PR		28 x 9 x 15 - 12PR		28 x 9 x 15 - 12PR		28 x 9 x 15 - 12PR	
6.5 x 10 - 10PR		6.5 x 10 - 10PR		6.5 x 10 - 12PR		6.5 x 10 - 12PR		6.5 x 10 - 12PR		6.5 x 10 - 12PR	
66.9	1,700	66.9	1,700	66.9	1,700	66.9	1,700	66.9	1,700	66.9	1,700
41.7 / 47.2	1,060 / 1,200	41.7 / 47.2	1,060 / 1,200	41.7 / 47.2	1,060 / 1,200	41.7 / 47.2	1,060 / 1,200	41.7 / 47.2	1,060 / 1,200	41.7 / 47.2	1,060 / 1,200
38.6	980	38.6	980	38.6	980	38.6	980	38.6	980	38.6	980
5.4	136	5.4	136	5.4	136	5.4	136	5.7	146	5.7	146
7.4	189	7.4	189	7.4	189	7.4	189	8.0	202	8.0	202
foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic		foot-operated, hydraulic	
hand, mechanical		hand, mechanical		hand, mechanical		hand, mechanical		hand, mechanical		hand, mechanical	
GP30N		DP30N		GP33N		DP33N		GP35N		DP35N	
K25E		4EG		K25E		4EG		K25E		4EG	
61.0	45.8	48.0	36.0	61.0	45.8	48.0	36.0	61.0	45.8	48.0	36.0
2,700		2,250		2,700		2,250		2,700		2,250	
129	175	131	177	129	175	131	177	129	175	131	177
1,600		1,800		1,600		1,800		1,600		1,800	
4 / 152	4 / 2.5	4 / 203	4 / 3.3	4 / 152	4 / 2.5	4 / 203	4 / 3.3	4 / 152	4 / 2.5	4 / 203	4 / 3.3
powershift		powershift		powershift		powershift		powershift		powershift	
1 / 1		1 / 1		1 / 1		1 / 1		1 / 1		1 / 1	
12		12		12		12		12		12	
2,610	180	2,610	180	2,610	180	2,610	180	2,610	180	2,610	180
76.5		75.5		76.5		75.5		76.5		75.5	

Call-out numbers shown in the diagram correspond to the first column of the specifications chart.

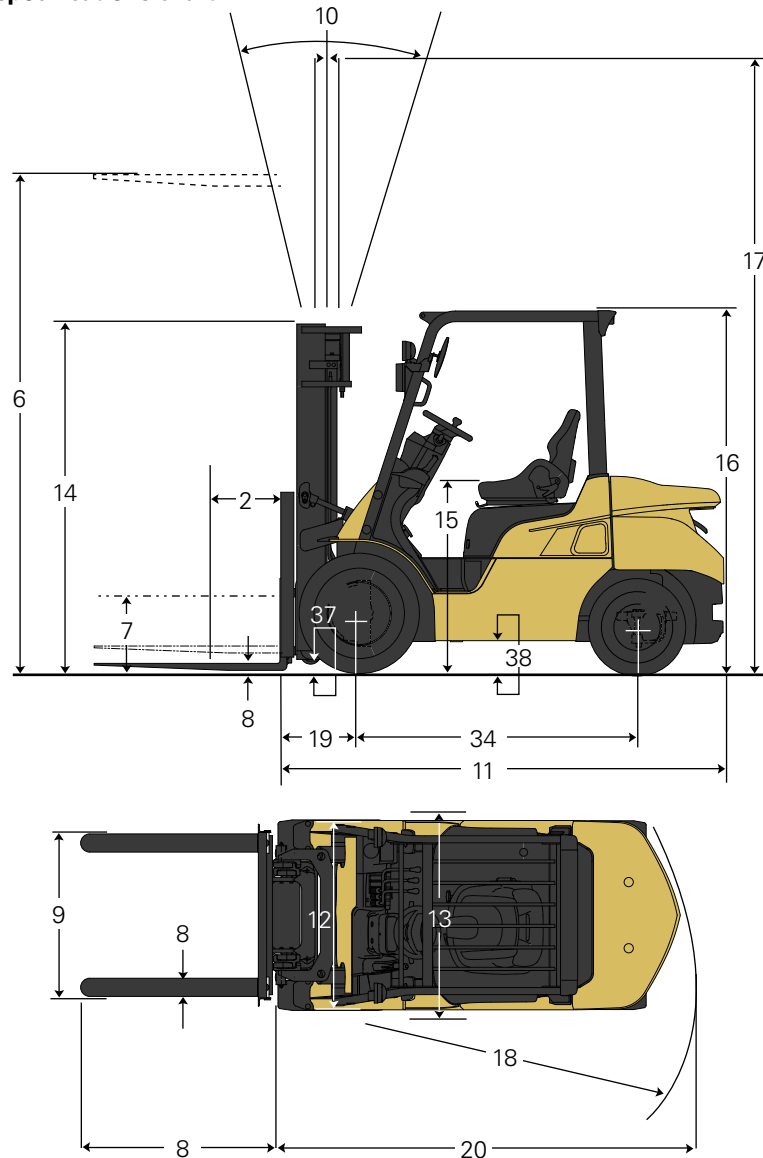

Safety Standards

These trucks meet American National Standards Institute/Industrial Truck Standards Development Foundation, ANSI/ITSDF B56.1.

UL-Classified by Underwriters Laboratories, Inc., as to fire and electric shock hazard only. Availability: Types G, LP and D standard.

Types GS, LPS and DS optional. Users should be aware of, and adhere to, applicable codes and regulations regarding operator training, use, operation, and maintenance of powered industrial trucks, including:

- ANSI/ITSDF B56.1.
- NFPA 505, fire safety standard for powered industrial trucks — type designations, areas of use, maintenance and operation.
- Occupational Safety and Health Administration (OSHA) regulations that may apply.

Contact your Cat lift truck dealer for further information, including operator training programs and auxiliary visual and audible warning systems, fire extinguishers, etc., as available for specific user applications and requirements. Specifications, equipment, technical data, photos and illustrations based on information at time of printing and subject to change without notice. Some products may be shown with optional equipment.



Your Cat lift truck dealer can provide additional options and features to specialize your lift truck for your unique application. Operator training and custom financing programs are also available to help find the right fit for your business.

Helping move businesses forward – that's how we're built.

BUILT FOR IT.™

1-800-CAT-LIFT | www.cat-lift.com

© 2015 MCFA. All Rights Reserved. CAT, CATERPILLAR, BUILT FOR IT, their respective logos, "CaterpillarYellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. All registered trademarks are the property of their respective owners. Some products may be shown with optional equipment.

CECV0027-01

09/15

CAT[®] Lift Trucks