

HINIKER

PROFESSIONAL PERFORMANCE
PROFESSIONAL STRENGTH
PROFESSIONAL RESULTS


PRODUCT
CATALOG



TRIP-EDGE
SCOOP PLOWS



FULL-TRIP
MID-SIZE PLOWS



TRIP-EDGE
C-PLOWS



TRIP-EDGE
CONVENTIONAL PLOWS



SAND & SALT
SPREADERS

HINIKER

Hiniker *Innovation*




Hiniker plows are built with one thing in mind—moving snow in the most efficient way possible! Check out the wide range of innovative designs on the following pages and find the perfect match for your plowing operation, whether it's a single plow or an entire fleet.

Hiniker plows are designed with the commercial plower in mind and our robust construction shows it. From the compression-type trip springs, to the reinforced moldboard frames, to the new Quick-Hitch 2 attachment system, Hiniker plows are built to work.

Hiniker works to make the operator's experience as pleasant as possible. Hook-ups are a snap with the Hiniker Quick-Hitch and Quick-Hitch 2 systems. The compact joystick controller is unsurpassed for convenience and simplicity. Super-bright quad composite halogen headlights light your way while high clearance trip-edge or trip moldboard systems smooth the ride and protect your investment.

Table of Contents

2-3	Introduction
4-5	SCOOP PLOW
6-7	VF PLOW
8-9	C-PLOW
10-11	Conventional 7000
12	Conventional 2000
13	Mid-Size
14-15	Spreaders
16-17	Accessories
18-19	Big Ox Skid Steer Plows
20	Specifications



QUICK-HITCH²

The Hiniker Quick-Hitch is the fastest plow mounting system available. The self-aligning drive-in mount lets you connect your Hiniker plow in seconds. This eliminates manually lifting, pushing, and pulling the plow into place.



Super-bright quad halogen headlights

have up to twice the power of typical sealed beam lamps. These headlights help create a high visibility, high illumination working area, which improves overall operator and motorist safety.



The quad halogen headlights also feature an advanced reflector array that maximizes brightness and increases beam pattern and range. Wrap-around turn signal lamps help increase visibility from all angles. Get maximum visibility for added safety, and better, faster plowing operations.

High-Performance Trip-Edge Plows



Heavy-Duty Poly Moldboard

All Hiniker 6000/7000/8000/9000 Series plows use a high-density polyethylene moldboard that allows snow to flow easily for more efficient plowing. Plus, it's dent-resistant and corrosion-free.




Horizontal-Truss Moldboard Frame

The horizontally trussed structure of the moldboard provides exceptional resistance to bending and bowing, for extra heavy-duty applications. Laser-cut steel ribs add exceptional strength.



Split Trip-Edge

Each section of the trip-edge operates independently of the other, reducing stress and twisting forces on the plow.



"No-Pinch" Pivot

Prevents stones, ice or other debris from jamming the trip-edge. This allows for the full return of the trip-edge every time.



High Clearance Trip-Edge

Hiniker's pinch-free pivot point is 9 inches above the surface providing protection from higher obstacles such as curbs and parking barriers.

HINIKER **SCOOP PLOW**

6000 SERIES

Super-bright quad halogen headlights have up to twice the power of typical sealed beam lamps.

Twelve (8') or fourteen (9') laser-cut ribs strengthen the moldboard frame.

Trouble-free compression-type trip springs.


1/4-inch thick HMW low-friction polyethylene moldboard never needs refinishing.

"No-Pinch" Pivot prevents stones, ice or other debris from jamming the trip-edge. This allows for the full return of the trip-edge every time.

Hydraulic scissors lift cuts transport bounce, eliminates chains.

Horizontal-truss moldboard frame provides exceptional resistance to bending and bowing.

Cast iron skid shoes are standard equipment.




The **ULTIMATE** Parking Lot Plow

Move snow more efficiently with a Hiniker trip-edge Scoop plow. The unique concave shape captures snow, providing greater capacity, less spillage, and faster, more efficient clean-up—plus the protection of a full width, three-section, high-clearance trip-edge.

SCOOP

- 20° Fixed-angle outer ends
- Conventional plow weight and simplicity
- V-Plow capacity and efficiency
- Fixed-end plow simplicity

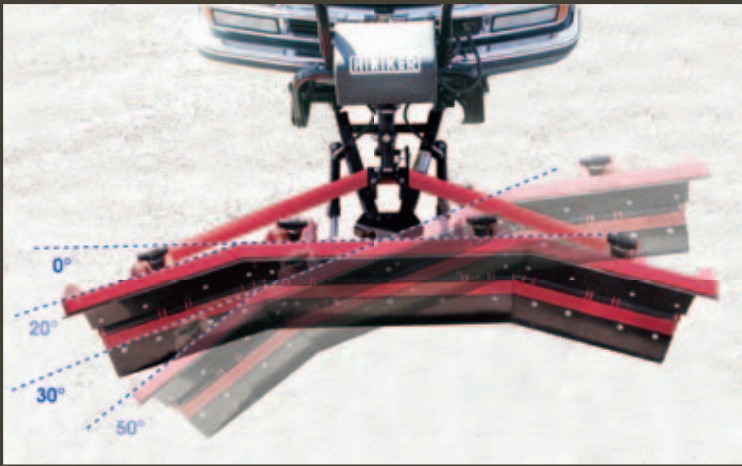

The ability of the Hiniker Scoop plow to angle full right or full left for conventional plowing, combined with the outer end's 50-degree forward angle, significantly reduces high-side spillage. The Scoop plow is ideal for parking areas and large lots where high-capacity, high-efficiency plowing is essential.



The Hiniker Scoop's concave shape captures more snow than other plow designs. Its concave design and fixed-end simplicity provides operators an effective and efficient plow for a wide range of applications.

SCOOP Specifications:

MODEL	6801	6901
BLADE WIDTH	8'	9'
BLADE HEIGHT	30"	30"
MOLDBOARD SURFACE	¼" HMW Poly	¼" HMW Poly
VERTICAL RIBS	12	14
COMPRESSION TRIP SPRINGS	4	4
CUTTING EDGE (HIGH CARBON 1084 STEEL)	⅜" x 6"	⅜" x 6"
POWER ANGLING RAMS	1½" x 10"	1½" x 10"
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	764 lb.	799 lb.



PUT SNOW IN ITS PLACE

HINIKER VF PLOW

9000 SERIES

Moldboards flare out from 30 inches high at center to 37 inches (8½' plows) or 38 inches (9½' plows). The high curve high-density polyethylene moldboards are dent-free and corrosion-free. Snow flows easily for more efficient plowing. Optional rubber or polyethylene snow deflectors available.

High clearance trip-edges operate independently of one another, reducing stress and twisting forces on the plow.




Super-bright quad halogen headlights have up to twice the power of typical sealed beam lamps.

6" high-carbon steel replaceable cutting edge.

Pinch-free pivot point is 9 inches above the surface providing protection from higher obstacles such as curbs and parking barriers.

One pass plowing . . . no problem! Hiniker's pitch adjustment levels the blade to assure full ground contact for optimum cleaning efficiency.

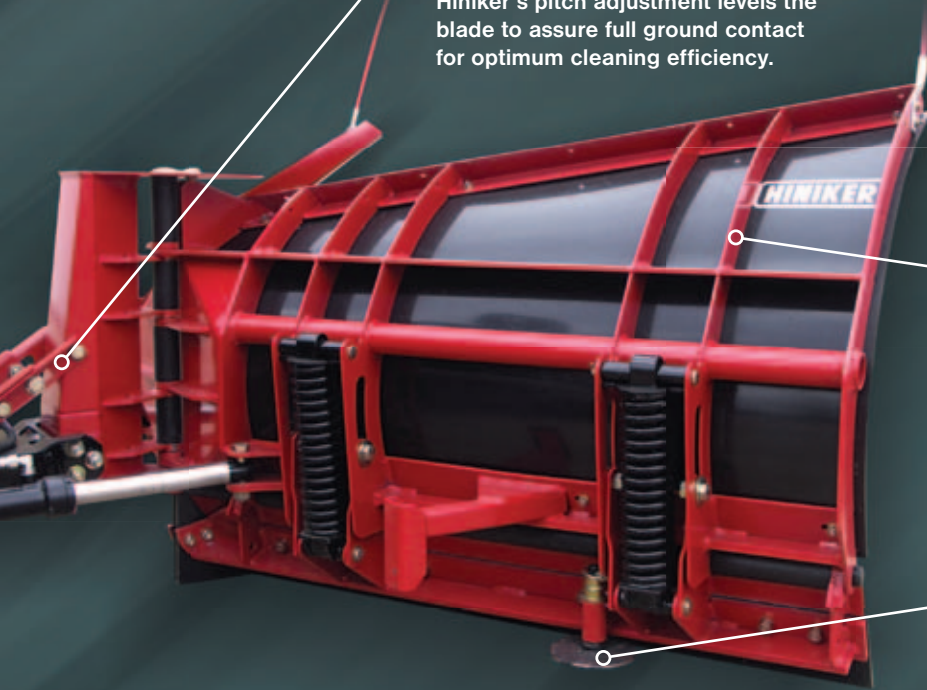

The high-tensile steel superstructure of the moldboard provides excellent resistance to bending and bowing, for extra heavy-duty applications. 12 laser-cut steel ribs add exceptional strength.

Long-lasting cast ductile-iron skid shoes.

Strength, Capacity, and Versatility

The new Hiniker 9000 Series V-Plows offer the versatility that only a V-Plow can, along with the strength and operator convenience that you've come to expect from Hiniker. Now available with deep-curl flared wings to cast deep snow farther and higher, while providing more scoop capacity than ever.

VF PLOW

- **Exclusive high pivot point trip-edge**
- **Super-bright quad halogen lights**
- **Double acting hydraulic power**



Double-acting cylinders provide positive hydraulic control of moldboard position, whether plowing forward or backdragging.

Convenient Command of all V-plow functions: Scoop, Vee, Angle Right, Angle Left, Raise and Lower.



Positive wing stops relieve stress on the hydraulic cylinders. 2-way cylinders provide precise moldboard control.



High-performance power units provide quick response & long-term reliability.

9851/9951 Flat-Top Version

Same rigid frame and poly moldboard design as the Hiniker "flare-wing," but in a 30-inch flat-top moldboard design.



VF PLOW Specifications:

MODEL	9851	9860	9951	9960
BLADE WIDTH	8½'	8½'	9½'	9½'
CUTTING WIDTH	V-POSITION	93.5"	93.5"	104"
	SCOOP	83.5"	83.5"	94"
	STRAIGHT	102"	102"	114"
	ANGLE	88.5"	88.5"	99"
MOLDBOARD HEIGHT	30"	30-37"	30"	30-38"
MOLDBOARD SURFACE	¼" HMW poly			
TRIP PIVOT POINT HEIGHT	9"			
TRIP SPRINGS	4			
STANDARD CUTTING EDGE	¾" X 6" High-Carbon Steel			
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	827 lb.	841 lb.	859 lb.	877 lb.



PUT SNOW IN ITS PLACE

HINIKER **C-PLOW**

8000 SERIES

30-inch tall, high curve, high-density polyethylene moldboards are dent-resistant and corrosion-free. Snow flows easily for more efficient plowing.

PUSH

9"

Super-bright quad halogen headlights have up to twice the power of typical sealed beam lamps.

Pinch-free pivot point is 9 inches above the surface providing protection from higher obstacles such as curbs and parking barriers.

PULL

The high-tensile steel superstructure of the moldboard provides exceptional resistance to bending and bowing, for extra heavy-duty applications. 10 laser-cut steel ribs add exceptional strength.

Long-lasting cast ductile-iron skid shoes.

Move More Snow FASTER

The Hiniker C-plow offers all of the heavy-duty performance of a conventional plow plus the added versatility of a high performance backdrag plow. Plow loading docks, residential driveways and congested parking areas faster than ever. The patented Hiniker C-Plow blade actually converts from a conventional plow into a backdrag plow with the push of a button, letting you remove snow quickly and easily from garage aprons, curbs, loading docks, and tight corners. Then touch a button again to flip the blade upright and push the snow away.

C-PLOW

- **Exclusive high pivot-point trip-edge**
- **Super-bright quad halogen lights**
- **Converts from a conventional plow to a backdrag plow with the push of a button**



The compact joystick control puts full control of all plow functions in the palm of your hand.



High-clearance split trip-edges operate independently of one another, reducing stress and twisting forces on the plow.

PUSH



PULL



C-PLOW Specifications:


MODEL	8802	8902
BLADE WIDTH	8'	9'
BLADE HEIGHT	30"	
MOLDBOARD SURFACE	1/4" HMW poly	
VERTICAL RIBS	10	
COMPRESSION TRIP SPRINGS	4	
PLOW WIDTH @ 30° ANGLE	83"	93"
TOP CUTTING EDGE (HIGH CARBON 1084 STEEL)	1/4" x 4"	
LOWER CUTTING EDGE (HIGH CARBON 1084 STEEL)	3/8" x 6"	
TRIP PIVOT POINT HEIGHT	9"	
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	800 lbs.	835 lbs.



PUT SNOW IN ITS PLACE

HINIKER *Conventional*

7000 SERIES

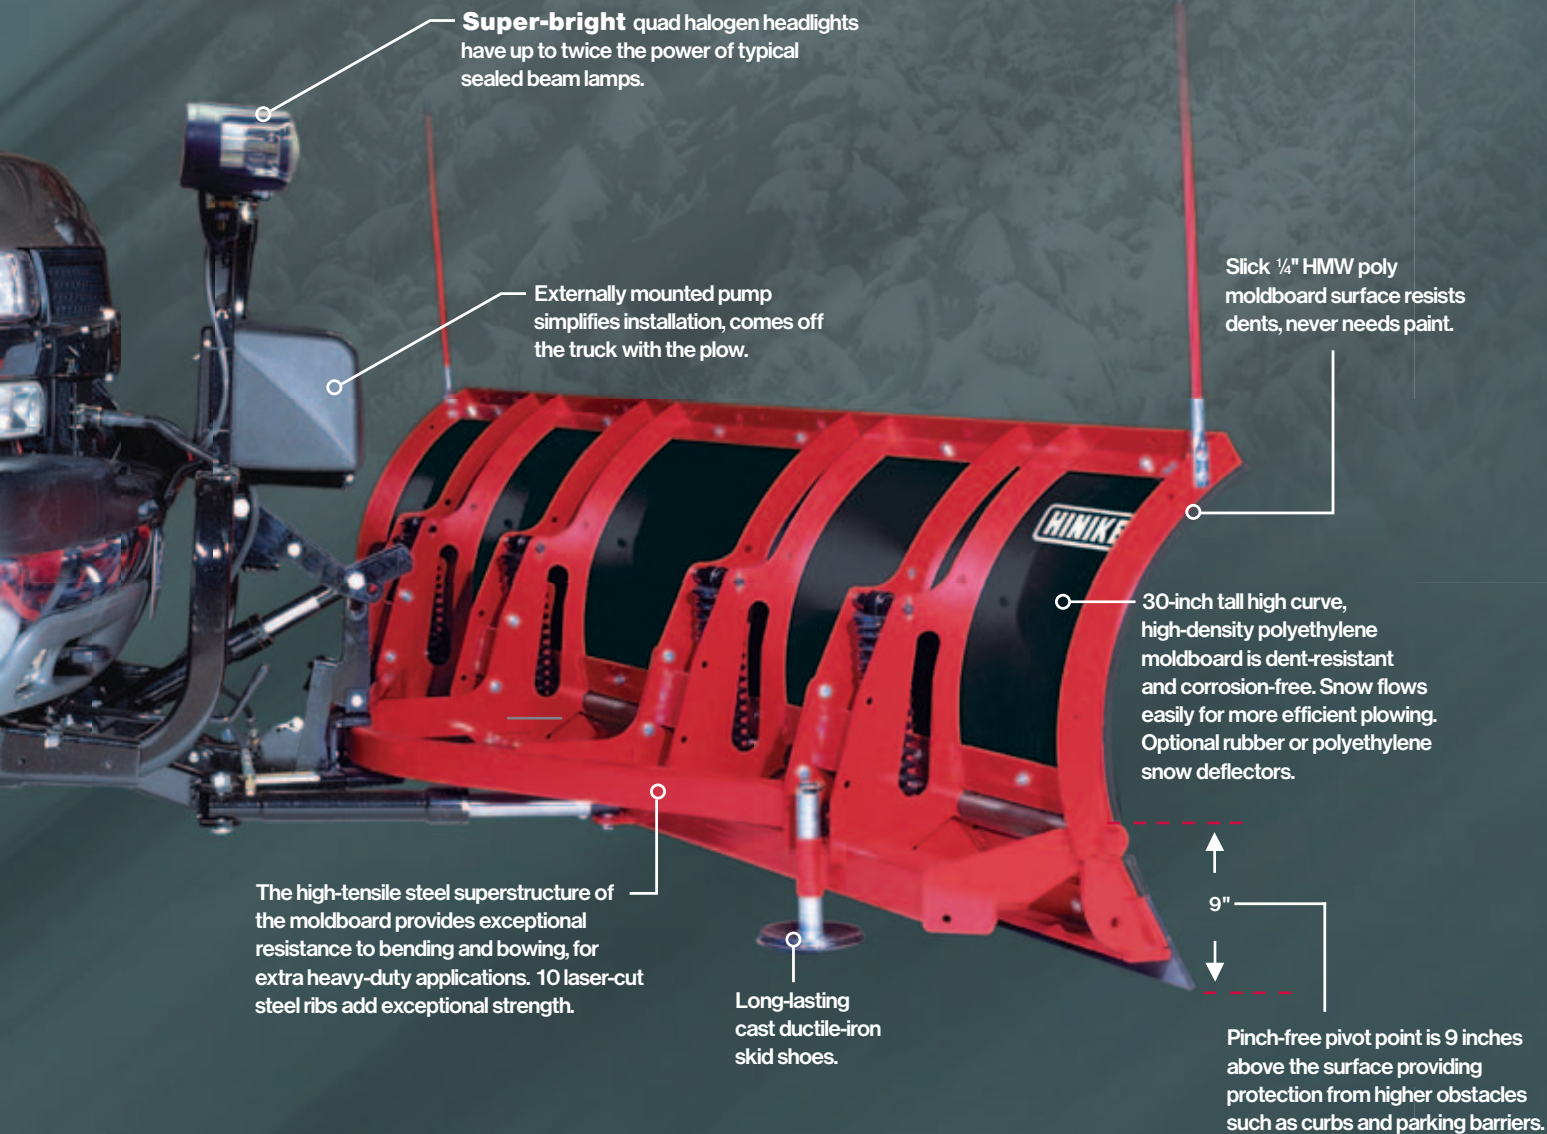

The **ULTIMATE** Performance With Hiniker Trip-Edge Straight Plows

The horizontal-truss moldboard design provides incredible strength, durability and resistance to bowing. Ten laser-cut support ribs add exceptional vertical strength. The corrosion-proof HDPE poly moldboard is dent-resistant with less surface friction for easier plowing and greater efficiency. Protection is provided by Hiniker's exclusive split trip-edge design.

- **High clearance split trip-edge**
- **Extra strength trussed moldboard frame**
- **Super-bright quad halogen headlights**
- **Exclusive Hiniker Quick-Hitch mounting system**



High clearance split trip-edges operate independently of one another, reducing stress and twisting forces on the plow.




Convenient, compact fingertip control mounts anywhere or can be hand held.

10 Foot Plow

Get professional plowing performance for your Ford F450/ F550, GM 4500/5500 or Dodge 4500/5500.

- **32" Tall high-capacity moldboard**
- **Corrosion-free, dent-resistant black HDPE polyethylene surface**
- **14 Rib welded moldboard frame**
- **Two-section split trip edge with 6 trip springs for maximum protection**
- **8 inch cutting edge—1/2 inch thick**
- **Plow-mounted electric/hydraulic or central hydraulic configurations**

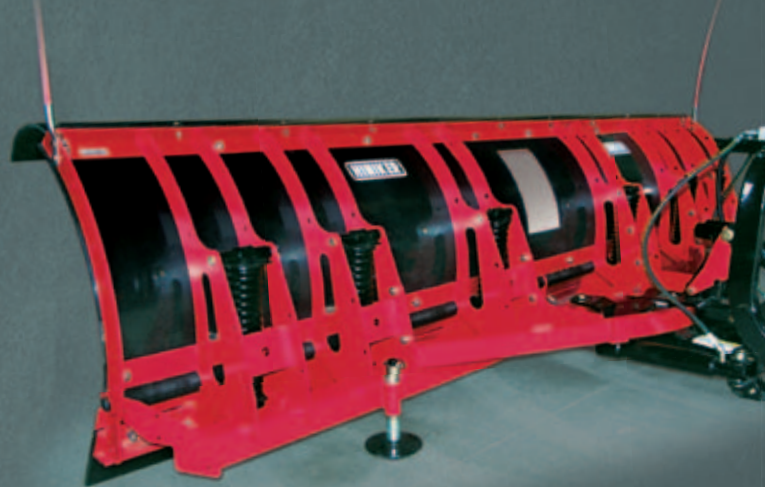

CONVENTIONAL PLOW *Specifications:*

MODEL	7802	7902	10331/10332
BLADE WIDTH	8'	9'	10'
BLADE HEIGHT	30"	30"	32"
VERTICAL RIBS	10	10	14
COMPRESSION TRIP SPRINGS	4	4	6
PLOW WIDTH @ 30° ANGLE	83"	93"	103"
CUTTING EDGE (HIGH CARBON 1084 STEEL)	3/8" x 6"	3/8" x 6"	1/2" x 8"
TRIP PIVOT POINT HEIGHT	9"	9"	9.75"
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	733 lbs.	767 lbs.	938 lbs. (electric/hydraulic) 894 lbs. (central hydraulic)



PUT SNOW IN ITS PLACE

HINIKER Conventional

2000 SERIES



Super-bright quad halogen headlights

Externally mounted pump simplifies installation, comes off the truck with the plow.

Robotic blade & frame welds assure uniform quality.

Heavy-duty box section plow frame resists twisting & bending.

Hydraulic scissors lift cuts transport bounce, eliminates chains.

Entire moldboard trips with soft-return compression springs.

Optional molded poly, rubber, or spring-loaded rubber (shown) snow deflectors.

30" tall, high curve blade rolls snow off quickly.



Polyethylene snow deflector (optional) provides a slick surface for smooth snow flow.



Progressive action full-trip design activates compression springs for trouble free performance.

Get *Professional Performance* With Hiniker Straight Blade Plows

Take a professional approach to snow removal! Hiniker 2000 Series full-trip snowplows use box section frames and heavily reinforced moldboards for strength and durability. 30 inch tall high-curve moldboards move heavy snowfalls quickly. Our hydraulic scissors lift reduces transport bounce and bang. Convenient compact joystick controls can be mounted anywhere or held in the palm of your hand. And the Hiniker Quick-Hitch mounting system is one system that truly lives up to its name. Count on Hiniker's proven performance—the professionals choice!

CONVENTIONAL PLOW *Specifications:*

MODEL	2753	2803	2853
BLADE WIDTH	7½'	8'	8½'
BLADE HEIGHT	30"	30"	30"
GAUGE OF STEEL	12GA	12GA	12GA
VERTICAL RIBS	6	6	8
COMPRESSION TRIP SPRINGS	2	2	4
PLOW WIDTH @ 31° ANGLE	77"	82"	87"
CUTTING EDGE (HIGH CARBON 1084 STEEL)	⅝" x 6"	⅝" x 6"	⅝" x 6"
POWER ANGLING RAMS	1½" x 10"	1½" x 10"	1½" x 10"
WEIGHT (NET OF TRUCK MOUNTED HARDWARE)	603 lbs.	614 lbs.	649 lbs.



PUT SNOW IN ITS PLACE


HINIKER Mid-Size

700 SERIES



Mid-Size

- Fully hydraulic controls
- Low maintenance full-trip moldboard
- Exclusive Hiniker Quick-Hitch mounting system

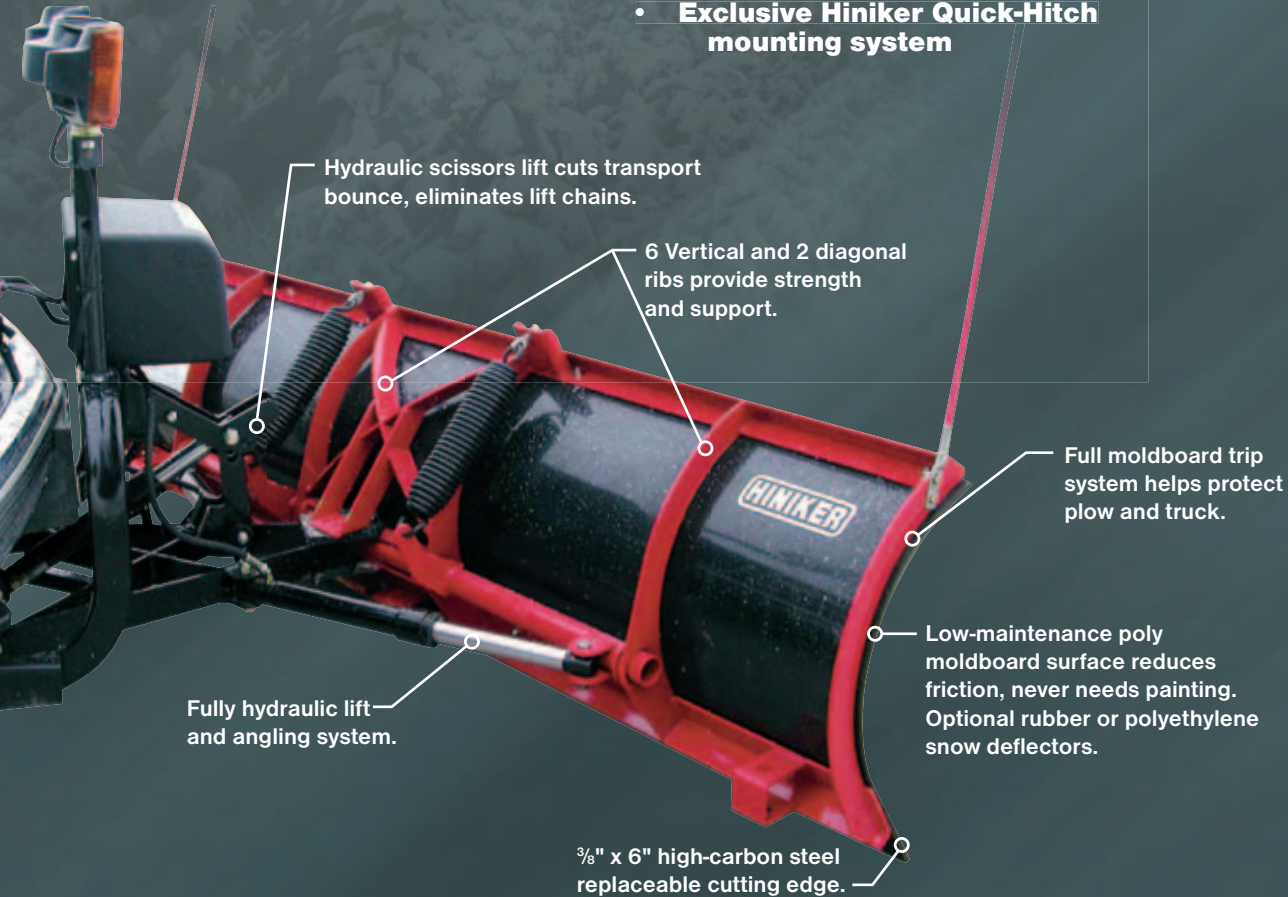

The Hiniker 700 series plow is designed for light truck owners who want to clear their own property. Get the ease and convenience that Hiniker plows are famous for in a plow designed for most full-size 1/2 ton and compact four-wheel-drive trucks.

MID-SIZE PLOW *Specifications:*

MODEL	702	752
BLADE WIDTH	7' (76" at full angle)	7 1/2' (82" at full angle)
BLADE HEIGHT	26"	26"
MOLDBOARD SURFACE	1/4" HMW Black Polyethylene	1/4" HMW Black Polyethylene
CUTTING EDGE	3/8" x 6" x 84"	3/8" x 6" x 92"
WEIGHT (NET OF TRUCK MOUNTED BRACKETS AND WIRING)	449 lb. removable	460 lb. removable




PUT SNOW IN ITS PLACE

HINIKER OHV Gas Engine Spreader

6.5 & 8 FT. V-BOX

- Available in 6.5' & 8' hopper lengths
- Corrosion-resistant stainless steel construction
- In-cab electric control of starter, throttle, and clutch functions
- Briggs & Stratton Intek AVS OHV engine

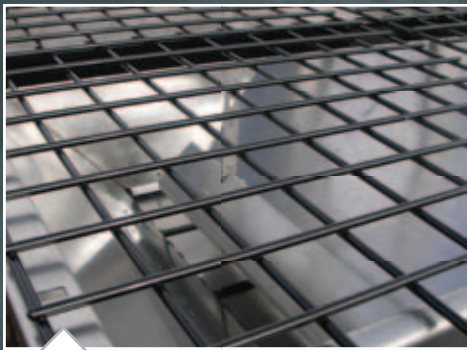

Optional easy-access hinged hopper grids.



Swing-away spinner chute for easier unloading and improved trailer hitch access.

Quick & Easy Material Spreading

Spread ice control materials quickly and easily with an efficient Hiniker spreader. Snow removal contractors looking for additional profits will find them in ice control. Private users and municipalities will benefit from the labor saving efficiency of the wide 25 ft. spread pattern. And a big 1.50 or 1.80 yard capacity means you'll spend your time productively, rather than constantly reloading.

Features

- Formed and welded hopper with 45 degree side slope for smooth material flow
- Conveyor features heavy-duty self-cleaning, pintle chain with 24,000 lb. tensile strength
- 14-gauge spinner chute assembly with adjustable deflectors
- Sealed cast iron gear case housing. Precision machined steel worm gear drives heavy duty bronze spur gear

GAS SPREADER *Specifications:*

	MODEL 825	MODEL 625
LEVEL CAPACITY	1.80 Cubic Yards	1.50 Cubic Yards
LENGTH	115" Overall/96" Hopper	97" Overall/78" Hopper
TOP WIDTH	50.5"	50.5"
MAX APPLICATION RATE	7.3 cu. ft./min	7.3 cu. ft./min



PUT SNOW IN ITS PLACE

HINIKER Dual-Motor Electric Spreaders

6.5 & 8 FT. V-BOX

- Dual Electric Drive Motors
- Stainless Steel Construction
- Adjustable Stainless Steel Inverted vee
- Optional Steel Hopper Screens



Convenient tip-up spinner assembly for unloading unused material and easy trailer hitch access.



Hiniker Control Console

- Individual variable speed control of conveyor and spinner
- Blast control for quick, extra-dense application
- Reverse switch to clear jams
- Built in diagnostics and overload protection
- Switch for optional vibrator

Precision Controlled *Accurate* Applications

Tailor your material applications rates accurately and conveniently with the Hiniker Dual-Motor Electric Spreader. The unit provides individual variable speed control for both the conveyor and spinner. Two electric motors offer quiet operation in residential and office areas, plus no downtime for refueling.

ELECTRIC SPREADER *Specifications:*

	MODEL 835	MODEL 635
LEVEL CAPACITY	1.80 Cubic Yards	1.50 Cubic Yards
LENGTH	115" Overall/96" Hopper	97" Overall/78" Hopper
TOP WIDTH	50.5"	50.5"
MAX APPLICATION RATE	5 cu. ft./min	5 cu. ft./min



PUT SNOW IN ITS PLACE

HINIKER *Accessories*

MAXIMIZE
PERFORMANCE



Rubber Snow Deflectors

Flexible rubber snow deflectors are designed to keep blowing snow out of the driver's sightline, while providing flexibility when carrying or stacking big loads. Add a spring kit for additional rigidity.



Polyethylene Snow Deflectors

Semi-rigid polyethylene provides a slick surface for enhanced snow flow. Adaptable to all Hiniker plows except the C-Plow.



Wear Bars

Save time and reduce maintenance costs with a set of abrasion-resistant chromium alloy wear bars. Get as much as three times the normal cutting edge wear life.



Curb Guards

Wrap-around curb guards protect the ends of your plow from excessive wear, helping prevent expensive repairs. Available for all Hiniker plows.

Also available with integrated chromium alloy wear bars for enhanced cutting edge life.



Box Ends

Capture snow with a set of Hiniker box ends. Recommended for best backdragging efficiency with the Hiniker C-Plow. (Not available for V-plows, Scoop plows or Mid-Size series plows.)



Flexstand

Make the most user-friendly controller in the industry even better with a Hiniker Flexstand. Easy to install, a convenient magnetic mount allows quick removal when not needed.



Snowplow Emergency Transport Strap

In the unlikely event of hydraulic or electrical failure, this handy strap will hold the plow up in the transport position while driving back to the shop.




Shown on flared wing.

V-Plow Box Wings

For Models 9851, 9860, 9951, 9960

Add more carrying capacity to your Hiniker V-Plow.

Designed for quick single-pin installation on each side of the plow, they are easily removed for transport or for conventional plowing.



Shown on flat-top plow.



Rubber Cutting Edges

Protect expensive brick, cobblestone, and embossed surfaces with a Hiniker rubber cutting edge. Comes complete with attaching hardware.



1/2" Steel Cutting Edges

Get extra wear in heavy use with 1/2" thick replacement cutting edges. Available as replacement parts for all Hiniker plows except the 700 Mid-Size Series.



Skid Shoes

Standard equipment on all full size Hiniker commercial plows, these long-lasting cast ductile iron skid shoes may also be ordered and installed on the 700 Series Mid-Size plow.



Emergency Parts Kit

Contains several of the most commonly needed repair parts, including pins, a hydraulic hose, solenoid coil, headlight relay, and hydraulic fluid.



Super-Bright Quad Halogen Headlights

Get up to twice the illuminating power of typical sealed-beam lamps for maximum visibility and better, safer, faster plowing. Standard on all models except 700 series, (order as replacement parts for 700 series plows).



Hiniker Cold Flow Hydraulic Fluid

Ensure maximum cold weather performance with genuine Hiniker Cold Flow hydraulic fluid. Minus 60 degree pour point ensures faster, more efficient operation in all types of weather.



Genuine Hiniker Replacement Parts

Maintain your Hiniker Equipment with genuine Hiniker factory replacement parts. Get the exact spec and fit you need for top performance.



PUT SNOW IN ITS PLACE

BIG OX 

Skid Steer Plows

C-PLOW

Conventional



- Tubular box-section frames
- Reinforced 30-inch high 12-gauge moldboard
- Moldboard floats and oscillates to clean uneven surfaces
- Full moldboard trip with dual compression springs
- Universal mounting plate attachment
- Abrasion-resistant sheathing protects hydraulic hoses



Corrosion-free, low-friction poly moldboard surface



- Compare Speed and efficiency. The C-Plow lets you move more snow in less time.
- Converts from a conventional plow to a backdrag plow with the touch of a button.
- Complete snow removal without a separate backdrag plow or loader.

Get the performance of a conventional plow and the added versatility of a backdrag plow in a single unit. Cut through snow with the power of a conventional plow. Then, with push-button ease, capture and pull snow as the blade transforms into a backdrag plow. Tight spaces, building edges, loading docks, curbs and corners are cleared quickly and easily.



U.S. Patent No. 6,314,666

Specifications: Series 2275/2280

BLADE HEIGHT	BLADE WIDTH	BLADE THICKNESS	WEIGHT	COMPRESSION TRIP SPRINGS	CUTTING EDGE (HIGH-CARBON STEEL)
30"	7 1/2' 8'	12 GA.	492 lb. 507 lb.	2	3/8" x 6"

Specifications: Series 2881/2891

BLADE HEIGHT	BLADE THICKNESS	WEIGHT	COMPRESSION TRIP SPRINGS	CUTTING EDGE (HIGH-CARBON STEEL) BOTTOM	CUTTING EDGE (1044 STEEL) TOP
30"	1/4" HMW Poly	8' - 792 lb. 9' - 830 lb.	4	3/8" x 6"	1/4" x 4"

6', 7' & 7 1/2' LOADER SNOWPLOWS for comp

Easy hook-up to any loader equipped with a skidsteer universal attachment plate. Dual springs provide full trip protection. Six horizontal and two diagonal ribs strengthen the moldboard.



Oscillating, floating design follows uneven and rutted surfaces for cleaner plowing. Slick HMW poly moldboard is dent-resistant and corrosion free.



Now available with universal skid-steer style mount or John Deere loader mount.

- Full-trip 26 inch tall moldboard
- Full 27 degree left and right rotation
- Choice of manual or hydraulic angle control
- Durable, corrosion-proof HMW poly surface
- Floating design follows uneven terrain
- Quick-tach universal skid-steer type mounting plate

V-PLOW



- High-clearance trip-edge protection
- Two-way hydraulics provide full moldboard control in Vee, scoop, left, right or straight modes
- Box-section steel-tube frame for long-term strength
- Abrasion-resistant sheathing protects hydraulic hoses from wear
- Universal mount plate for easy hook-up



Slick HMW Poly Surface.

Floating, oscillating moldboard stays on the ground in uneven terrain.



SCOOP



- 20° Fixed-angle outer ends
- Conventional plow weight and simplicity
- V-Plow capacity and efficiency



Concave shape captures snow to efficiently clear lots and parking areas. Angles left or right for conventional plowing.

Outer end is angled forward at 50° in full left or right position, reducing high-side spillage.

Specifications: Series 29851/29951

BLADE HEIGHT	BLADE WIDTH	BLADE THICKNESS	WEIGHT	COMPRESSION TRIP SPRINGS	CUTTING EDGE (HIGH-CARBON STEEL)
30"	8½' 9½'	¼" HMW Poly	732 lb. 770 lb.	4	¾" x 6"

Specifications: Series 2680/2690

BLADE HEIGHT	BLADE WIDTH	BLADE THICKNESS	WEIGHT	COMPRESSION TRIP SPRINGS	CUTTING EDGE (HIGH-CARBON STEEL)
30"	8' 9'	¼" HMW Poly	764 lb. 799 lb.	4	¾" x 6"

act utility tractors

Specifications: LOADER SNOWPLOW Series 260/270/276

BLADE HEIGHT	BLADE WIDTH	BLADE THICKNESS	WEIGHT	TRIP SPRINGS	CUTTING EDGE (HIGH-CARBON STEEL) BOTTOM
26"	6'	¼" HMW Poly	397 lb.	2	¾" x 6"
26"	7'		419 lb.	2	¾" x 6"
26"	7½'		430 lb.	2	¾" x 6"



Skid Steer Plows



Truck mounted plow specs

	HINIKER PLOWS	MODEL	BLADE WIDTH (FT)	BLADE HEIGHT (IN)	MOLDBOARD SURFACE	WEIGHT (LBS) (REMOVABLE)
HIGH-PERFORMANCE TRIP-EDGE	SCOOP PLOW	6801	8'	30"	¼" HMW Poly	764
		6901	9'			799
	V-PLOW Flat-Top	9851	8½'	30"	¼" HMW poly	827
		9951	9½'			859
	VF PLOW Flare-Top	9860	8½'	37"	¼" HMW poly	841
		9960	9½'	38"		877
	C-PLOW	8802	8'	30"	¼" HMW poly	800
		8902	9'			835
	CONVENTIONAL PLOW	7802	8'	30"	¼" HMW poly	733
		7902	9'			767
10331		10'	32"	938 (electric/hydraulic)		
10332				894 (central hydraulic)		
FULL-TRIP	CONVENTIONAL PLOW	2753	7½'	30"	12 GA Steel	603
		2803	8'			614
		2853	8½'			649
	MID-SIZE PLOW	702	7' (76" at full angle)	26"	¼" HMW poly	449
		752	7½' (82" at full angle)			460

WE RESERVE THE RIGHT TO AMEND THESE SPECIFICATIONS AT ANY TIME WITHOUT NOTICE. THE ONLY WARRANTY APPLICABLE IS OUR STANDARD WRITTEN WARRANTY. WE MAKE NO OTHER WARRANTY, EXPRESSED OR IMPLIED.



SCAN ME.

Use your QR code reader on your smartphone to find out more about Hiniker snow and ice equipment.

HINIKER COMPANY
 58766 240 St • P.O. Box 3407 • Mankato, MN 56002-3407
 Phone (507) 625-6621 • (800)-433-5620 • Fax (507) 625-5883

www.hiniker.com



TRIP-EDGE
CONVENTIONAL PLOWS
10 FOOT PLOW



BIG OX SKID STEER PLOWS
V-PLOW



FULL-TRIP
CONVENTIONAL PLOWS