

# The JFB Body Series – Customized Confidence

The 35-Ton Integrated Wrecker comes with one of three storage solutions, depending on your needs:


	JFB BRONZE Perfect to configure your own truck		JFB SILVER Includes our most popular features		JFB GOLD Maximized solutions	
	35T Tri-Axle	35T Tandem-Axle	35T Tri-Axle	35T Tandem-Axle	35T Tri-Axle	35T Tandem-Axle
Frame Fork Storage	•	•	•	•	•	•
Tool Drawer			•	•	•	•
Rotary Chain Rack			•	•	•	•
Snatch Block Storage			•	•		•
Rotary Snatch Block Storage					•	
Shackle Rack					•	•
30-Gallon Stay Dry Silo					•	•
Wheel Chock Storage					•	•
Tow Light Storage					•	•
Fire Extinguisher Storage					•	•
Traffic Cone Storage					•	•
Bottle Jack Storage					•	•
36" Lower Shelf						•
36" Upper Shelf						
48" Upper Shelf					•	•
Shovel Storage					•	•
Flashlight Mounts					•	•
(3) 24" x 43" Tilt Down Drawers						•
(2) 36" x 43" Tilt Down Drawers					•	
(1) 36" x 43" Tilt Down Drawer						
Ladder Storage					•	•
Tool Storage					•	•
Chain Binder Rack					•	•
Spill Kit Storage						•
Cribbing Storage					•	•
Flare Storage					•	•
Grizzly Bar Storage					•	•
Strap Storage						
Broom Storage						
Tow Package with Fifth Wheel, Pintle Hook with Ball, Bus Arm 14k or 25k	•	•	•	•	•	•

Note: Many of these items are also available through your Tow Support distributor.

## Engineered to Exceed

The 35-Ton Integrated Wrecker, like all Jerr-Dan equipment, is engineered to exceed. From the elevation and reach of the recovery boom and underlift, to the power of the tilt feature, this unit is built to perform.

Whether the task is righting an overturned vehicle or hooking up to a casualty, the specifications of this unit will exceed the demands of your heavy-duty business.

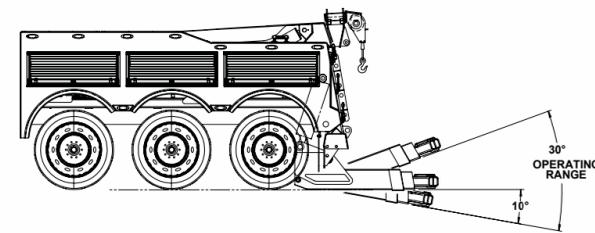


	35-Ton Integrated	Tandem	Tri-Axle
Min Chassis GVWR		54,000 lbs.	54,000 lbs.
Min Cab to Drive Tandem (Clear CT)		154"	154"
Min Frame RBM (each rail)**		3,250,000 in-lbs.	3,250,000 in-lbs.
Min FAWR**		14,600 lbs.	14,600 lbs.
Min RAWR		40,000 lbs.	40,000 lbs.
Max Unloaded Frame Height		45"	45"
Min Frame Length Behind Rearmost Axle		43"	43"

\*\*Higher minimums are required if mounting in combination with a Side Recovery System (SRS). Refer to SRS sales literature for requirements.

Feature Dimensions*	Reach	Rating
A. Centerline of Rear Tandem to Tailboard	66"	—
B. 300 Coach U/L Retracted Reach w/Forks	69"	30,000 lbs.
350 U/L Retracted Reach w/Forks	63"	35,000 lbs.
C. 300 Coach U/L Extended Reach w/Forks	147"	16,000 lbs.
350 U/L Extended Reach w/Forks	128"	16,000 lbs.
D. Recovery Boom Retracted Reach at 3°	12"	—
Recovery Boom Retracted Reach at 30°	-17"	70,000 lbs.
Recovery Boom Retracted Reach at 40°	-34"	—
Recovery Boom Extended Reach at 3°	132"	—
Recovery Boom Extended Reach at 30°	87"	22,000 lbs.
Recovery Boom Extended Reach at 40°	59"	—
E. Boom Working Height to Hook at 30°	193"	—
Boom Working Height to Hook at 40°	229"	—
F. Boom Max Height at 40° (Max)	261"	—
G. 300 Coach U/L Max Towing Height	42"	—
350 U/L Max Towing Height	43"	—

Note: All values based on a 42" truck frame height and are rounded to the nearest inch. Values are subject to change without notice.

\*All dimensions are approximate.

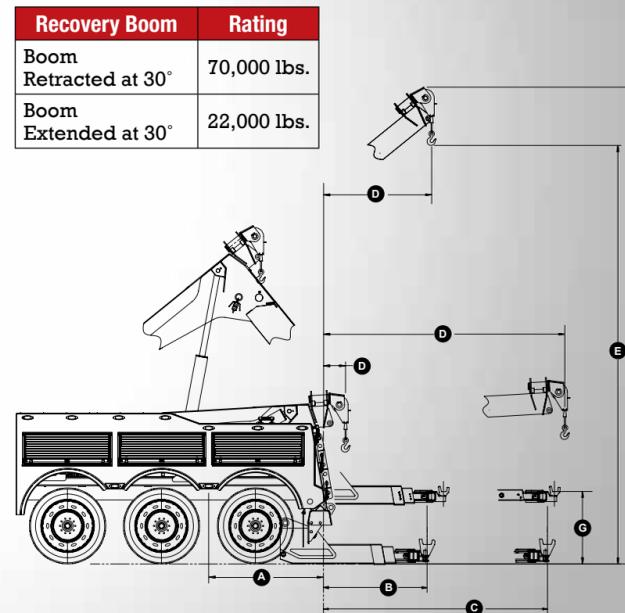

## JERR-DAN

An Oshkosh Corporation Company

The Jerr-Dan name and Jerr-Dan logo are registered trademarks of Jerr-Dan Corporation. ©2016 Jerr-Dan Corporation. Some equipment shown may be optional. Specifications subject to change without notice or obligation. All ratings specified are based on structural factors only, not vehicle capacities or capabilities.

**MAX LIFT CAPACITY**

RET: 70,000 lbs.  
EXT: 22,000 lbs.

**MAX BOOM EXTENSION**

RECOVERY: 132"  
UNDERLIFT: 147"

**MAX WORKING HEIGHT**

229"

# JERR-DAN


# ENGINEERED TO EXCEED



## 35-TON INTEGRATED WRECKER

# Welcome to Incident Management-Driven Design

It's one thing to build a wrecker that exceeds your expectations on performance. But our 35-Ton Integrated Wrecker also sets the standard on safety from top to bottom, inside and out.

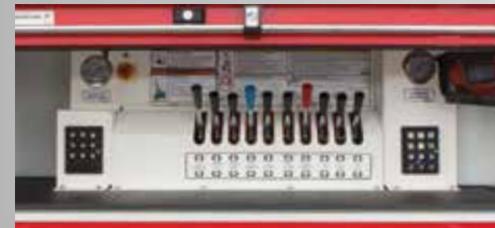


Available for both tandem and tri-axle chassis, the Jerr-Dan 35-Ton Integrated Wrecker shown here is fully equipped with the JFB Gold storage solutions package (excluding rigging accessories).

## Engineered with Jerr-Dan's exclusive Incident Management Driven (IMD) design methodology, this hardworking wrecker features:

- Roll-up storage doors — easy to see and be seen roadside
- Boom and lift control access from both sides of the chassis for safe, flexible operation
- An independently shock-mounted body design, which flexes with chassis twist to reduce the wear associated with extreme-use conditions
- Advanced LED lighting kit for high visibility

## The Jerr-Dan Limited Lifetime Warranty\*

Our rugged, non-corrosive body is made of weather-tight and impact-resistant polypropylene. And it's covered under a limited lifetime warranty. How's that for confidence?

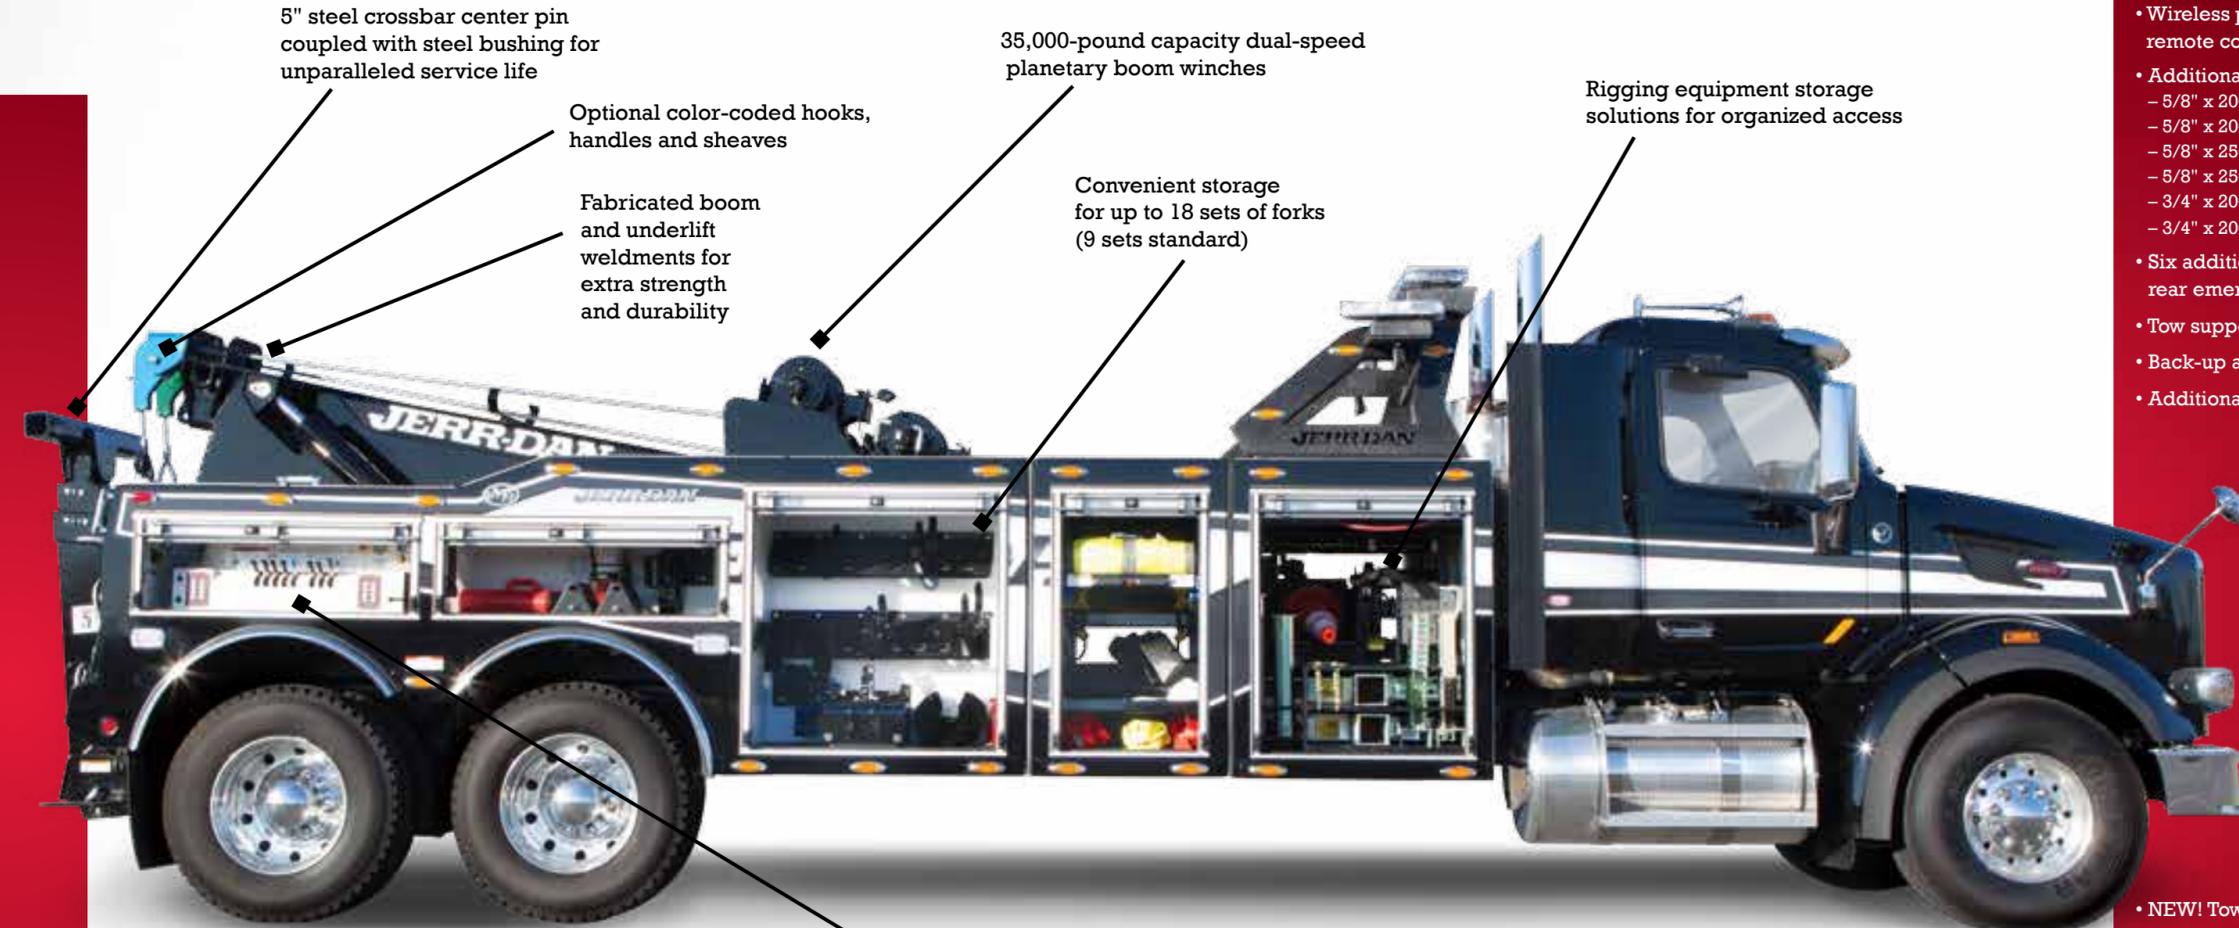

5" steel crossbar center pin coupled with steel bushing for unparalleled service life

Optional color-coded hooks, handles and sheaves

Fabricated boom and underlift weldments for extra strength and durability

35,000-pound capacity dual-speed planetary boom winches

Convenient storage for up to 18 sets of forks (9 sets standard)

Rigging equipment storage solutions for organized access

Jerr-Dan's exclusive JD Touchlink™ electrical and air controls, available on both driver and passenger side for convenient access



Telescoping rear stabilizers with integrated fold-down spade feet



Load-rated anti-slip handles and steps



Easy-access tilt-down trays



The legendary, patented Jerr-Dan chain carousel for quick access

### Available Options:

- Side Recovery System (SRS™), Jerr-Dan's pivoting boom that allows for recovery from either side
- Adjustable Performance Counterweight (APC™)
- Tunnel counterweight in 3.5k, 4.5k and 6.5k; available on 51" battery tunnel only
- Wireless proportional or non-proportional remote control for all boom functions
- Additional cable options, including:
  - 5/8" x 200' EIPS galvanized
  - 5/8" x 200' EIPS with swivel hook
  - 5/8" x 250' EIPS
  - 5/8" x 250' EIPS with swivel hook
  - 3/4" x 200' EIPS
  - 3/4" x 200' EIPS with swivel hook
- Six additional side and two additional rear emergency flashers (CA compliant)
- Tow support rigging kits
- Back-up and underlift cameras
- Additional storage solution kits

- NEW! Towing Package Includes 14k or 25k bus arms, 2 in. or 50 arm ball and fifth wheel, plus the storage solution for each.

\*48 hours from notification, valid in North America only, some restrictions apply. Limited lifetime warranty provided only by the body supplier and not Jerr-Dan. Jerr-Dan provides a one-year full warranty and five-year structural warranty. Mechanism covered for material or weld failure for five years. For more information, contact the Jerr-Dan warranty department.