





Shown with optional equipment









Dimensions:


Model	Overall Length	Bulkhead Height	Cab Guard	A	В	C	D	CA	Approx. Weight
SL-LS-9 42BH/40CG	9'	42"	40"	50.25"	52"	112"	152"	60"	2,280 lbs.
SL-LS-10 42BH/40CG*	10'	42"	40"	62.25"	52"	144.25"	164.25"	84"	2,375 lbs.
SL-LS-12 42BH/40CG	12'	42"	40"	86.5"	52"	148.25"	188.25"	84"	2,625 lbs.
SL-LS-12 54BH/12CG	12'	54"	12"	86.5"	52"	148.25"	160.25"	84"	2,575 lbs.



^{* 10&#}x27; body for use with Rev-Pak on 84" CA

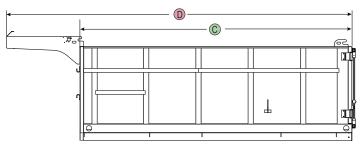

Roadside View (40" cab guard shown)



Curbside View (12" cab guard shown)

Depend on quality Reading features standard:

- Universal understructure, wired and ready to go to work
- 2" tie-down bar on each side
- High-gloss black powder coat finish



Tarp Tie Down Tension Cleats Positioned on the top of the body for easy door opening



Fully Welded Cab Guard Includes integral wind deflector and lashing rings, available in 40" and 12"



Scissor Hoist 50° angle, double-acting 8-13 ton capacity



Rear Door Holdbacks Mounted on the side of the body to hold the rear door open to access the bed area



Rear Swing-Out Barn Doors Clear opening doors swing 270°, include cam latch assembly



Side Swing Door 52" wide door 180° door swing 42" high sides

Optional Equipment:



Slide Away **Access Ladder** Underbody self-storing ladder for easy tarp control or cab guard access



Access Step Retractable step for slide out convenience and storage located under the side door opening for easy curbside access

Fold Away



Underbody Box Storage Secure, weather-tight storage won't impede the cargo space





EQUIPMENT COMPAN