

APPLICATION INSTRUCTIONS

FOR THE

PE SPOT & ARROW SET

Spot Application


Using Product Number: 17-1W-058

SIZE: Spots are 6 inches in diameter; layout as shown is 35 ft by 35 ft, layout can be any size

ESTIMATED PAINT TIME: 1-2 people for 2-4 hours

FIRST READ: Completely read "General Instructions". Prepare surfaces as recommended before painting.


- Layout out stencils as shown below. Chalk a line to desired length and align strips of spots at shown below center, overlapping the spots to ensure proper 5 foot spacing. Paint spots desired color, let dry and remove stencils. Painted pavement should look as shown below right.

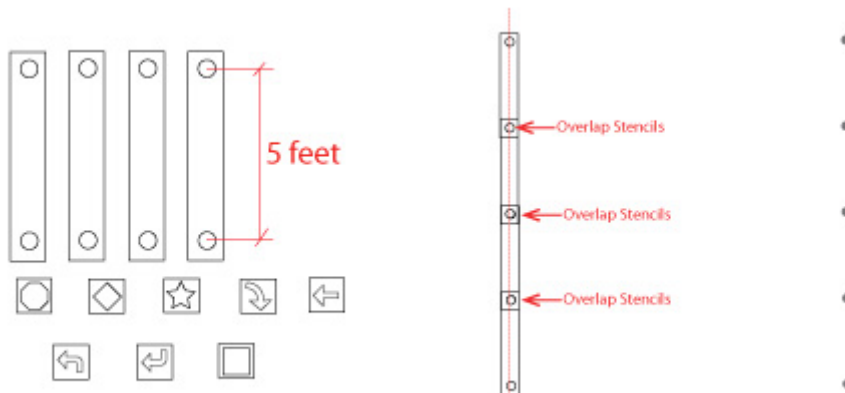


- Chalk second line as shown below, 5 feet from center of painted spots. Using dried stencil strips, align over painted spots and chalk line, shown below left. Paint spots desired color, let dry and remove stencils. Painted pavement should look as shown below center. Continue to third line, shown right, and so forth until desired width is completed.



3. To complete rows, align spot stencil strips as shown below left and paint. Once desired layout is completed, repaint each 1-2 more times to achieve desired vividness and allow to dry for 24 hours before use.

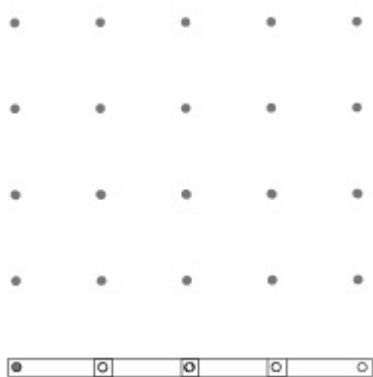

4. If shapes and arrows are to be added, position stencils as desired (one example of many possibilities shown below left). Paint shapes desired color, let dry and remove stencils. Painted pavement should look as shown below right.

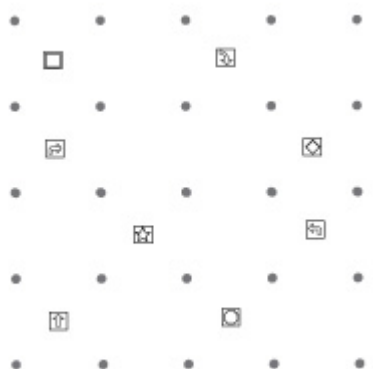

5. Repaint each print 1-2 more times to achieve desired vividness and allow to dry for 24 hours before use.

Any questions? We're here to help – call us at (800) 681-0684!