



APPLICATION INSTRUCTIONS FOR THE

ROBOT HOPSCOTCH®

Product Number: ST 5021



SIZE: approximately 10 feet long x 6 feet wide

ESTIMATED PAINT TIME: approximately 1 – 2 people for 2 – 4 hours.



FIRST READ: Completely read "General Instructions". Prepare surfaces as recommended before painting.

1. Place STENCIL B in desired location. Using chalk, mark the alignment holes at the top. Paint ONLY the large square boxes where the numbers will be applied. Repeat 1-2 more times to achieve desired vividness, drying after each application, and remove STENCIL B. It should look like the illustration to below right.


2.

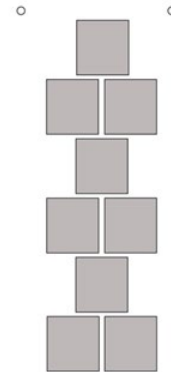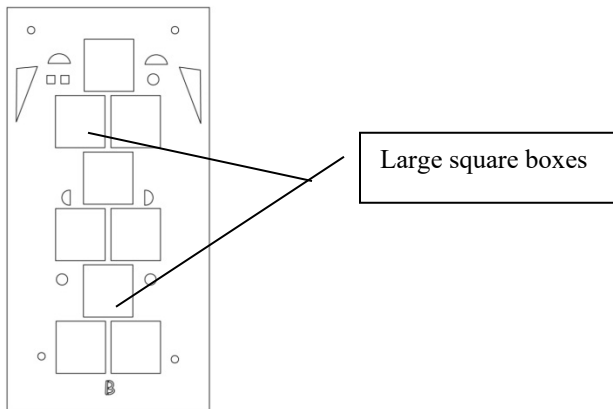


3. Align STENCIL A to painted pavement using alignment holes. Paint whole stencil with colors of your choice. Repeat 1-2 more times to achieve desired vividness, drying after each application, and remove STENCIL A. Let dry. It should like below right.

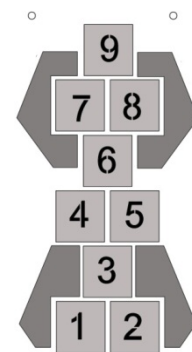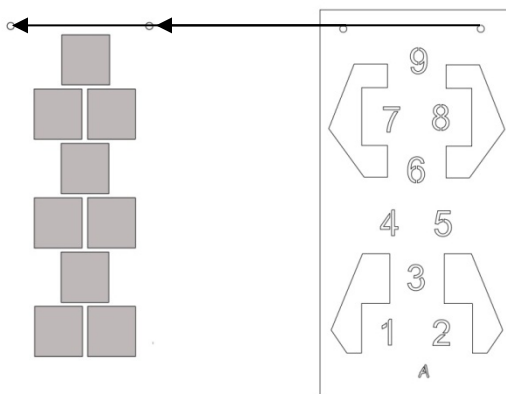


4. Align STENCIL B using the alignment holes and place over painted pavement. Paint small shapes along top sides of stencil. Repeat 1-2 more times to achieve desired vividness, drying after each application, and remove STENCIL B. Let dry. It should like below right.

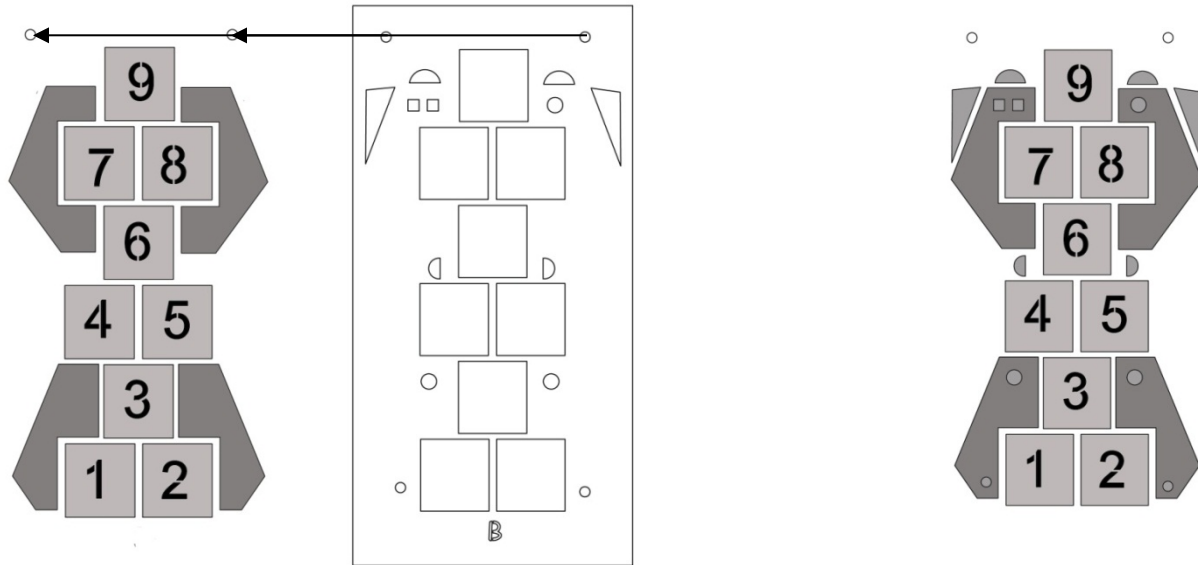

5. Align STENCIL C using alignment holes and place next to painted pavement. Align STENCIL E to arm and STENCIL F to right bolt at base as shown below left. Repeat 1-2 more times to achieve desired vividness, drying after each application, and remove STENCIL C, E and F. Let dry. It should like below right.

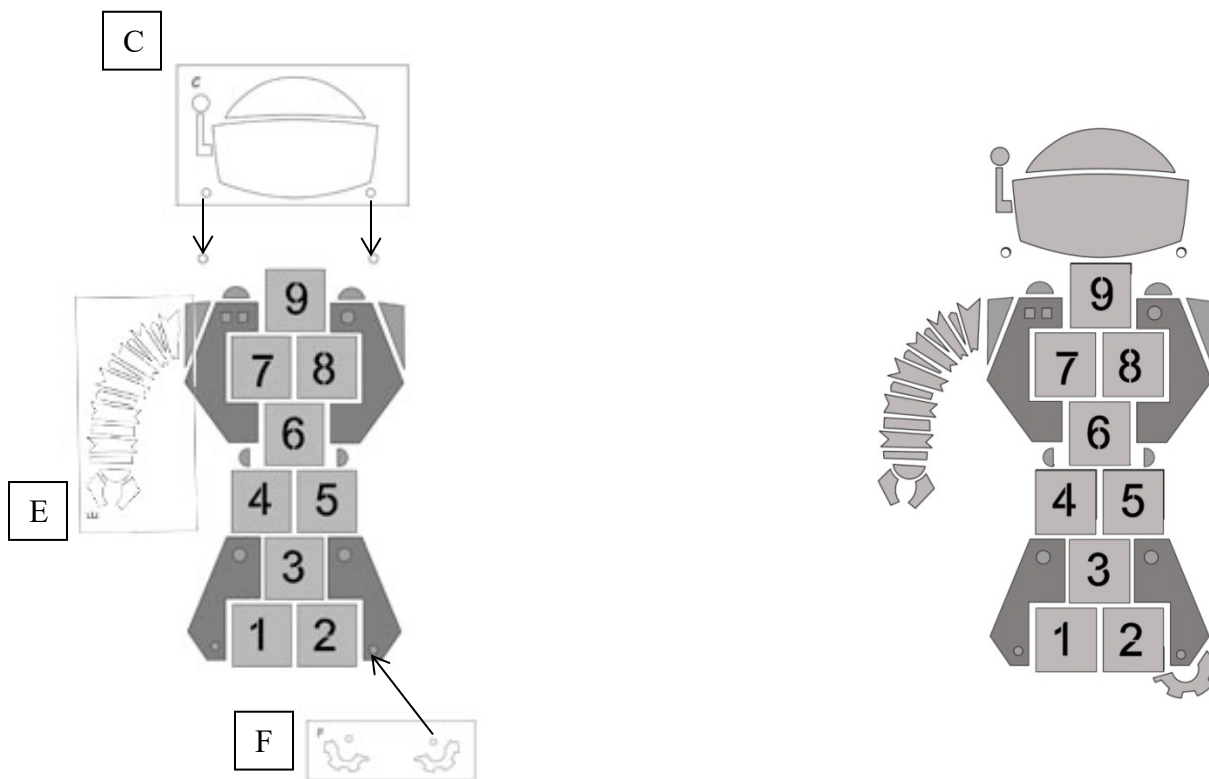

6. Align STENCIL D using alignment holes and on top of painted head. Align STENCIL E to arm as shown and STENCIL F to left bolt at base as shown below left. Repeat 1-2 more times to achieve desired vividness, drying after each application, and remove STENCIL D, E and F. Allow all paint to dry for a minimum of 24 hours. It should look like illustration to the right when done.

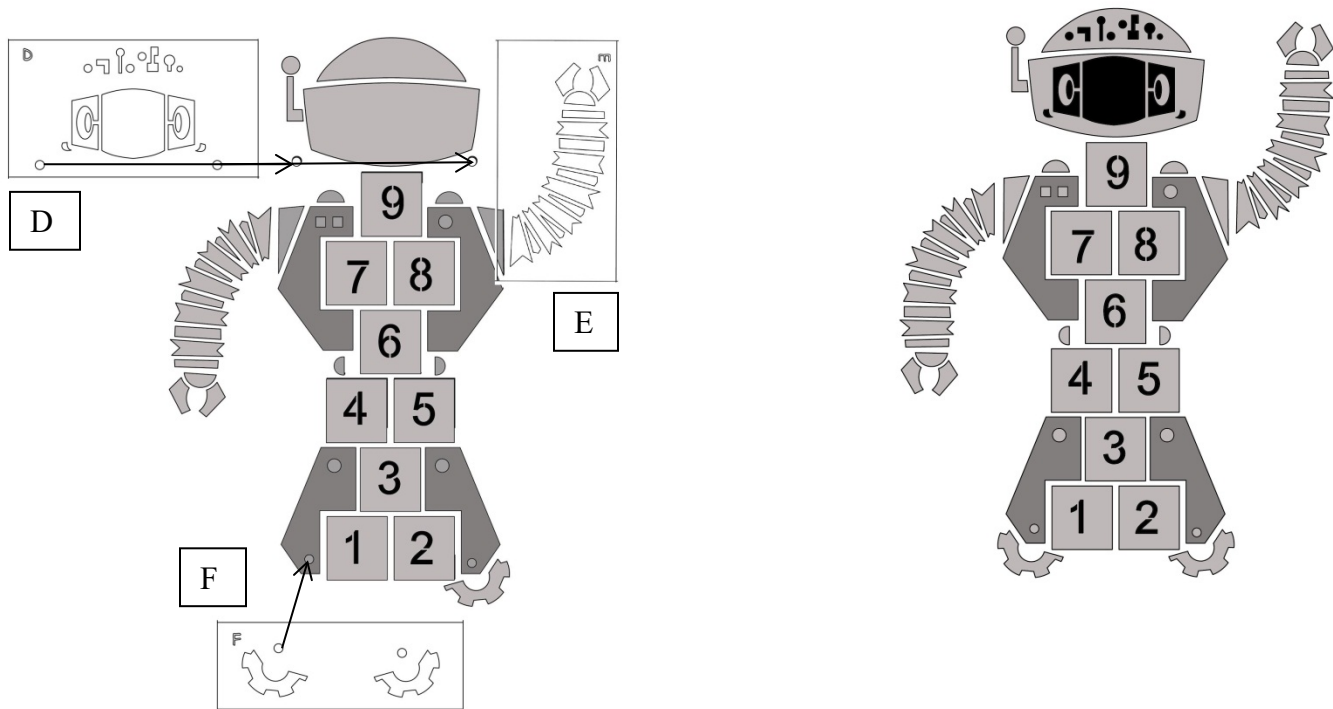

Any questions? We're here to help – call us at (800) 681-0684!