




SLIM S.r.l.

Via dei Tigli, 14/16 (Z.I.)
20853 - Biassono (Monza Brianza) - Italy
commerciale@slim.it
www.slim.it

CODE: **TBF/06RC/SU**

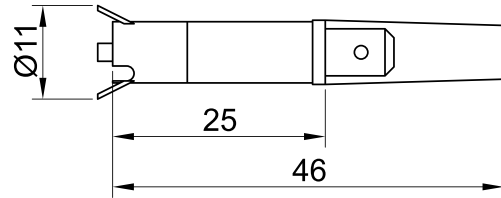

The lens connected from the front panel is fitted with the indicator body positioned on the back of the panel in correspondence with the drilling template (3 support points)

It is shorter than the 06C model

Lamps	Incandescent • neon/fluoro • LED
Working Voltage	2V • 6V • 12V • 24V • 48V • 110V • 250V • 400V
Working temperature	120°C Max • 150°C Max
Hole diameter	6mm
Recommended thickness panel	from 0,5mm to 2mm
Method of connection to the panel	self-locking
Type of connection	male faston 6,3x0,8mm • male faston 4,8x0,8mm
Type of lens	SU1 • SU2 • SU3 • SU4 • SU5 • SU 6

Lenses available

SU1	SU2	SU3	SU4	SU5	SU6
