

ZTP-115ML Thermometrics IR Module



The ZTP-115ML infrared module is used for non-contact surface temperature monitoring. This thermopile IR module presents the temperature compensated single outputs via l^2C with optics (Silicon Lens). It can also provide compatibility with the customer's device without the need for recalibration. The ZTP-115ML uses 4-wire connections: two signals for l^2C output, single power supply and ground.

The field of view of each element of ZTP-115ML is about ± 5 degrees for 50% normalized output. The total size is only 30 mm X 28 mm.

Applications

- Microwave oven
- IR Detector for narrow FOV detection

Features

- Single module
- Digital temperature output
- I²C output
- Fully calibrated and compensated

Amphenol Advanced Sensors

Specifications

Supply Voltage Single Supply (+5V)


Output mode Temperature (I²C protocol)

Temperature Range -20°C ~ 100°C

Operating Temperature -20°C ~ 100°C Storage Temperature -20°C ~ 120°C

Thermopile Sensor ZTP-115

Module Size 30 mm x 28 mm

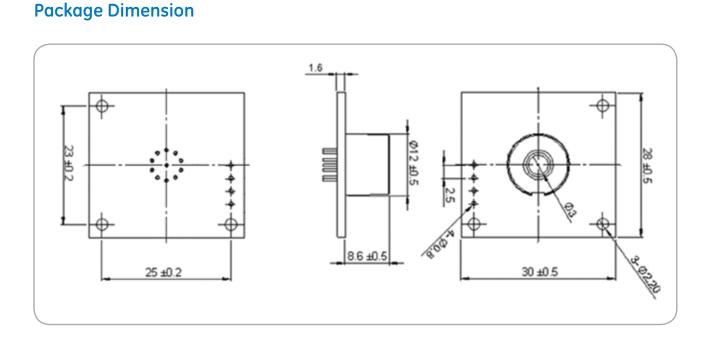

Amphenol Advanced Sensors

www.amphenol-sensors.com

© 2014 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.