

## NTC Type JI/JIC Waterproof IP68 Temperature Sensor Overmolded NTC Thermistor



NTC Type JI

**Type JI:** The NTC thermistor is molded onto a flexible circular cable. The tip and outer cable insulation material is thermoplastic elastomer rubber. The tinned copper conductors have individual polypropylene insulation.

### Features

- Waterproof to IP68
- Withstands freeze/thaw cycling
- Range of wire lengths 300 mm to 5000 mm (11.8 in to 16.4 ft)
- Halogen-free cable
- Sensor tip and extension cable molded together as one hot vulcanised unit
- RoHS compliant



#### NTC Type JIC

**Type JIC:** The NTC thermistor is molded onto a flexible circular cable housed in stainless steel. The tip and outer cable insulation material is thermoplastic elastomer rubber. The tinned copper conductors have individual polypropylene insulation.

### Applications

- Ventilation
- Refrigeration
- Heat pumps
- Water heaters
- Weather stations
- Outdoor temperature measurement
- Under-floor heating
- Fish tanks
- Evaporators

### Options

- Other resistance temperature characteristics
- Other wire lengths
- Other housing lengths


### **Amphenol** Advanced Sensors

# NTC Type JI/JIC Specifications

Temperature Range:	-50°C to +105°C (-58°F to 221°F) continuous (125°C/257°F up to maximum 6 hours)	
Dielectric Strength:	3750V AC	
Insulation Resistance: >100M $\Omega$ at 1000V DC		
Cable Type:	2 x 0.30 mm <sup>2</sup> (23 AWG)	
Wire Conductors:	7 x 0.23 mm diameter (0.30 mm <sup>2</sup> )	

	NK103C1R2	DC95F103WN	
R25°C (R77°F)	10kΩ ± 2%	10kΩ	
Tolerance 0°C - 70°C		±0.2°C	
B value 25/85°C (R77/185°F)	3977K	3969K	
Material	1	F	
For complete RVT Table, refer to document AAS-913-318.			


20 nom 05 max [0.79] 0.20] 0.20] 0.20] 0.20] 0.20] 0.20] 0.20] 0.20] 0.20] 0.20] 0.20] 0.20] 0.14] 0.14] 0.14] 0.14] 7x0.23mm [0.28]




### **Ordering Information**

Resistance characteristics and wire length are specified by the product code as per the table below:

Code	Assembly Type				
JI	Double-insulated sensor with rubber tip				
JIC	Double-insulated sensor with Stainless Steel housing				
I.	Code	Thermistor Type			
	103C1R2	NK103C1R2			
	F103W	DC95F103WN			
	1	Code	Wire Length mm (in)		
		L301	300 (11.8) ± 10 (0.4)		
		L102	1000 (39.4) ± 20 (0.8)		
		L252	2500 (98.4) ± 50 (2.0)		
Ļ	Ļ	Ļ			
	Typical Model Number				



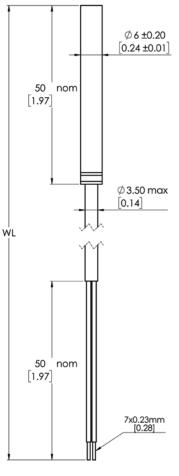

NTC Type JIC - Dimensions

### Amphenol Advanced Sensors

#### www.amphenol-sensors.com

© 2019 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.