


9422 - 9426

9451 - 9456

	Aluminium	
	2500 mm	9422 - 9426
	3000 mm	9451 - 9456
	Stainless Steel	
	100 - 180 kg	



- Ribbed and sealed construction in aluminium alloy
- Stainless steel rope
- Adjustable capacity by worm screw
- Safety suspension
- Safety device against load dropping due to the spring breakage (capacity >3kg)
- Centrifugal safety device
- Upper rotary suspension with safety hook
- Locking device to block the load at any height
- Adjustable stroke limiting device
- Taper drum rotating on ball bearings
- Cable guide in antifriction material
- Rotary upper hook with ball bearing
- Lining up top hook
- Visible cable to aid inspection
- Inert spring drum assembly
- Option - B/B1 - Floor control locking device
- Option RI - Rotary insulated hook

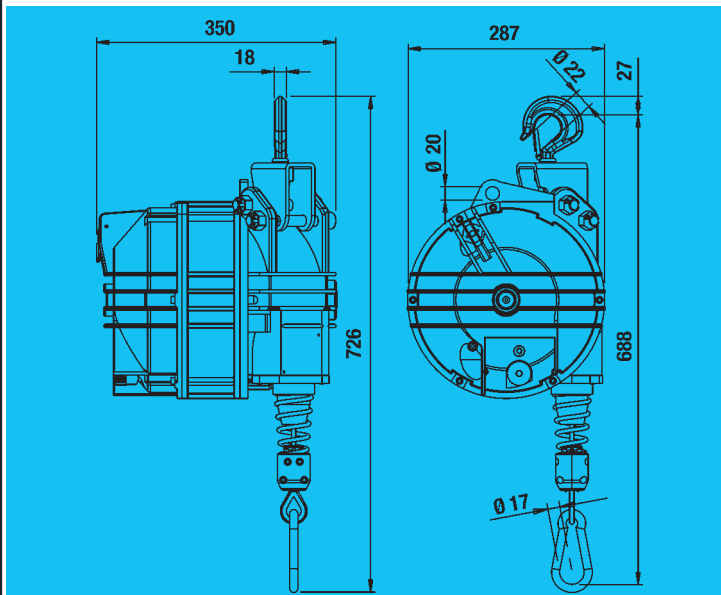

Item	9422	9423	9424	9425	9426
kg	100 - 120	120 - 140	130 - 150	140 - 160	160 - 180
kg	36,61	38,51	38,83	40,90	43,20

9451	9452	9453	9454	9455	9456
100 - 115	115 - 130	130 - 140	140 - 150	150 - 160	160 - 180
36,61	36,77	38,51	38,83	40,90	43,20


9422G - 9426G

9451G - 9456G

	Aluminium/Rubber	
	2500 mm	9422G - 9426G
	3000 mm	9451G - 9456G
	Stainless Steel	
	100 - 180 kg	



- Ribbed and sealed construction in aluminium alloy with rubber protection
- Stainless steel rope
- Adjustable capacity by worm screw
- Safety suspension
- Safety device against load dropping due to the spring breakage (capacity >3kg)
- Centrifugal safety device
- Upper rotary suspension with safety hook
- Locking device to block the load at any height
- Adjustable stroke limiting device
- Taper drum rotating on ball bearings
- Cable guide in antifriction material
- Rotary upper hook with ball bearing
- Lining up top hook
- Visible cable to aid inspection
- Inert spring drum assembly
- Option - B/B1 - Floor control locking device
- Option RI - Rotary insulated hook

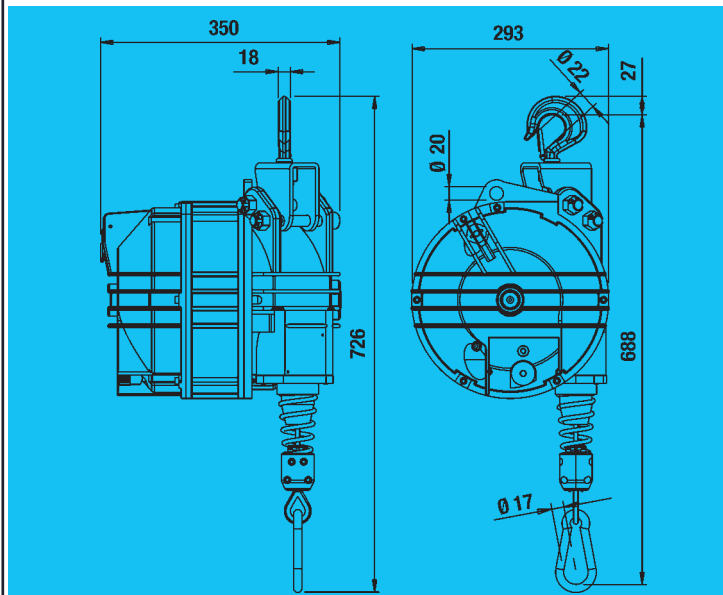

Item	9422G	9423G	9424G	9425G	9426G
kg	100-120	120-140	130-150	140-160	160-180
kg	37,83	39,74	40,06	42,13	44,43

9451G	9452G	9453G	9454G	9455G	9456G
100-115	115-130	130-140	140-150	150-160	160-180
37,83	37,99	39,74	40,06	42,13	44,43