

Medium Duty Industrial Cable Reels

Battery Charging Reels

SIMBAL battery charging reels are available in a range of sizes and can be supplied with or without the red and black clamps.

Features:

- Shock resistant plastic external case (series 4200)
- Die cast aluminium (on series 6200 drums)
- Galv steel (series 1400 / 1700 drums)
- Cable roller guide
- Ratchet stop every 50mm (easily disconnected if not required)
- IP42 Protection (IP65 available on some models)
- Working temperature -5 / +40 deg C



Possible applications

Typical fields of application for our battery charging reels include garage applications, plus many more applications across a wide range of industries.

Other reels in the range include 230V single phase and 400V 3 phase cable reels, earthing reels and many other reels for a variety of special applications. For further information please call our sales team on 01298 813883, email: sales@simbal.net or visit our website at www.simbal.net

Optional extras

Standard options which can be fitted to SIMBAL medium duty spring operated cable drums include rubber cables, IP65 protection seals & fixing bolts to restrict the swivel action of fixing bracket. A range of cable roller guides is also available to compliment the full range of drums.

Technical Data

Please see the following sheets for technical and dimensional data

Type 4216



Type 6216



Type 1425 / 1426 / 1796




Medium Duty Industrial Cable Reels

Battery Charging Reels


Technical Data

Type	Coiled cable length	Conductor section	Power	IP	Cable Type
4216	6m	9mm ²	30 amps	IP42	IGUS Chainflex CF130
6216	9m	9mm ²	30 amps	IP42	
1424	12m	15mm ²	50 amps	IP65	
1425	12m	15mm ²	100 amps	IP65	
1796	17m	15mm ²	100 amps	IP65	


4216 Reel Dimensions

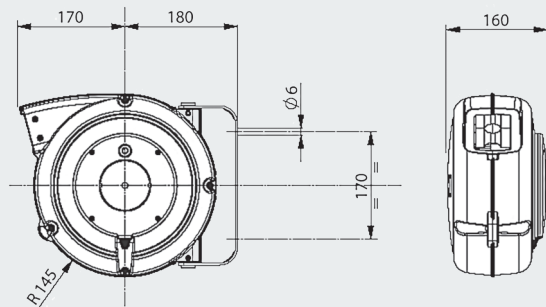

6216 Reel Dimensions

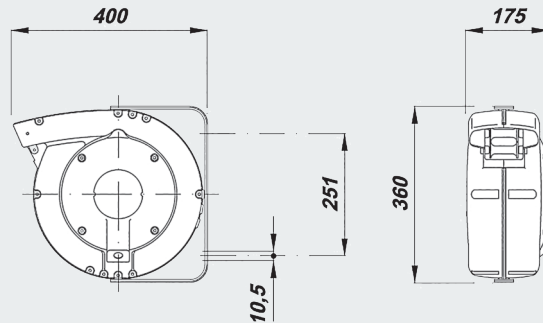

1400 Reel Dimensions

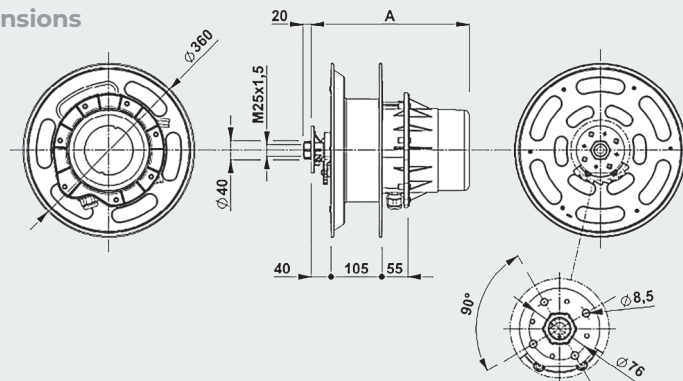

1796 Reel Dimensions

