



www.buzonuk.com



Technical Data Sheet

BC-KIT-5 Batten Holder

COMPONENTS

BC-KIT-5 is composed of 1 piece.

CHARACTERISTICS

Weight: **0,019 kg**

Minimum height of joist: **30 mm**

Maximum width of joist: **100 mm**

MATERIAL

Copolymer polypropylene (CPP)

Composition: **+/- 80%** first grade pre-selected recycled PPC, and **+/- 20%** Talc + Masterbatch black

Designed and manufactured in Europe

Use of recycled materials exclusively of EU origin

Resistant to weathering, sea salts, algae and a wide range of chemicals

Temperature range: **-30 °C to +80 °C**

PACKAGING

Pieces per carton: **240 pcs**




Carton weight: **5,06 kg**

Carton dimension: **400 x 270x 325 mm**

Cartons per pallet: **60 pcs**

Pieces per pallet: **14400 pcs**

Pallet dimensions: **100 x 120 x 220 cm**

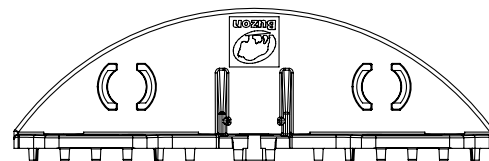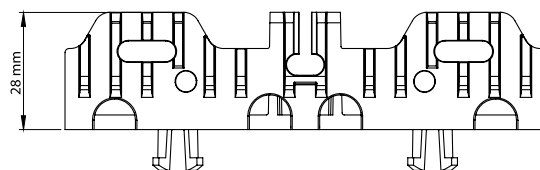

APPLICATIONS

The batten holder kit is fixed in place by pressing it on to the head of a BC pedestal. It can then be used for effectively securing timber, composite or metal joists on top of the pedestals to create a sub-frame for decking.

SAFETY INSTRUCTIONS

Buzon pedestals are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning vehicles, automobiles and other similar equipment.