

# Cable Drag Chains

## Simbal CKS Medium Series Cable Chains

SIMBAL ‘CKS’ Medium series plastic cable chains are a popular solution for a wide range of medium duty applications where multiple cables are involved and cable segregation may also be required. This range of chains is available in a variety of dimensions up to a maximum internal size of 175 x 42mm and can carry as many as 35 individual cables depending on cable section.


A full description of sizes, applications and carrying capacities of each size within the range is available by referring to our specific cable chain catalogue or by contacting our sales team on 01298 813883, or by email at [sales@simbal.net](mailto:sales@simbal.net)



Simbal ‘CKS’ Medium Series – Dimensions & Capacity



| Chain type | Bend radius (mm)     | Internal dimensions |          | External dimensions |          | Max number of cables | Max speed m/sec |
|------------|----------------------|---------------------|----------|---------------------|----------|----------------------|-----------------|
|            |                      | Min (mm)            | Max (mm) | Min (mm)            | Max (mm) |                      |                 |
| CK25       | 40 / 75 / 100 / 125  | 40 x 25             | 100 x 25 | 62 x 42             | 122 x 42 | 20                   | 7               |
| CK30       | 50 / 75 / 100 / 150  | 40 x 30             | 100 x 30 | 62 x 47             | 122 x 47 | 25                   | 7               |
| CK35       | 50 / 75 / 100 / 150  | 40 x 35             | 175 x 35 | 64 x 52             | 199 x 52 | 30                   | 7               |
| CK42       | 75 / 100 / 150 / 200 | 40 x 42             | 175 x 42 | 64 x 58             | 202 x 58 | 35                   | 7               |

### Cable Segregation

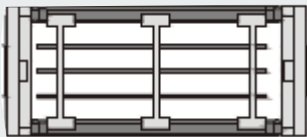

For applications requiring cable segregation both horizontal & vertical separators are available for our medium series chains

### Typical End Fittings

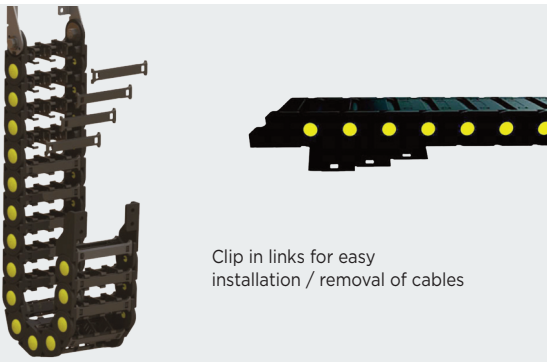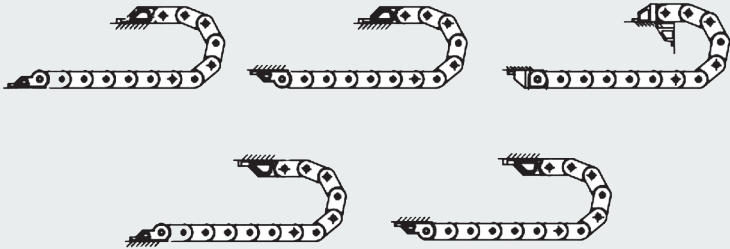

Clip in links for easy installation / removal of cables



Tight bending radius for use in confused spaces