

# Hose Reeling Drums

## Type AM86 Hose Reels

### Type AM86

The Type AM86 is a popular solution for applications requiring a high quality hose reel, even more so with the introduction of the new range of drums shown here.

#### Technical Features:

- Technopolymer casing.
- Complete with orientable pivot bracket.
- Provided with hose ratchet stop device, easily removable if constant traction is required.



AM86 / 10

AM86 / 13



KPU

- **KPU:** flexibility & high resistance, exclusive by Zeca

AM86 / 10 PVC

AM86 / 13 PVC

PVC blue

- **PVC:** soft touch and resistant to scraping

AM86 / 10 NBR

AM86 / 13 NBR

100R6  
black

- **NBR:** resistance without compromise

AM86 / 13 FD

PU food

Stainless steel  
AISI 316L

- **PU Food:** suitable for food sector

AM86 / AGRI

PVC  
yellow

- **AGRI:** professionalism in the agricultural sector

#### Popular Fields of Application



Auto repair  
workshops



Industry



Food industry



Construction



Commercial  
kitchens



Agriculture


# Hose Reeling Drums

## Type AM86 Hose Reels

Technical Data								
Type	AM86/10	AM86/13	AM86/10 PVC	AM86/13 PVC	AM86/10 NBR	AM86/13 NBR	AM86/13 FD	AM86 AGRI
Hose I/D. Ø	10mm (3/8")	12.5mm (1/2")	10mm (3/8")	12.5mm (1/2")	10mm (3/8")	12.5mm (1/2")	12.5mm (1/2")	12.5mm (1/2")
Hose length	25m	16m	20m	12m	18m	12m	12m	18m
Max pressure	15 bar	15 bar	15 bar	15 bar	15 bar	15 bar	15 bar	6 bar
End hose fitting	3/8" M BSP	1/2" M BSP	3/8" M BSP	1/2" M BSP	3/8" M BSP	1/2" M BSP	1/2" M BSP AISI 316L	No
Temperature range	-5°C / +50°C		-5°C / +50°C		-5°C / +50°C		-5°C/+65°C	-5°C/+40°C
Incoming hose fitting	No		No		No		No	No
Incoming hose	1.5m		1.5m		1.5m		1.5m	1.5m
Air	SI / Yes		SI / Yes		SI / Yes		SI / Yes	SI / Yes
Water	SI / Yes		SI / Yes		SI / Yes		SI / Yes	SI / Yes
Hose type	KPU		PVC blue		SAE 100R6 black		PU food*	PVC yellow
Atex			—		—		—	—

\* NOTE: REG. UE 1935/2004 AND REG. UE 10/2011 CERTIFIED HOSE FOR USE IN THE FOOD INDUSTRY. NOT SUITABLE FOR FOOD LIQUIDS TRANSFER.

### Dimensions

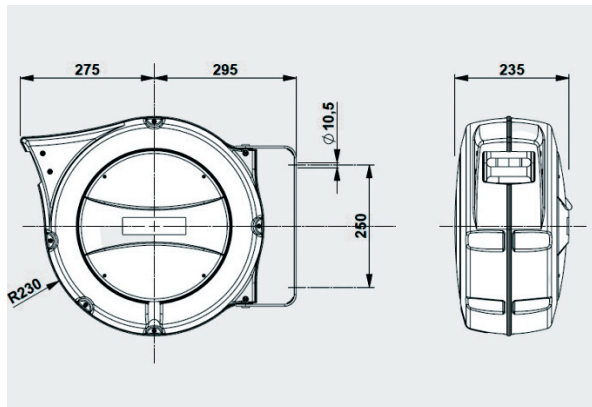

Compliance with Directive 2014/34/EU  
Marking  II 2 GD c IIB T6/T85° C X  
Type Examination Certificate Number IMQ 15 ATEX 002X  
Compliance with EN 13463-1 : 2009 | EN 13463-5 : 2011

ISO EN 12100



2006 /42 / CE



14



mm 550x505x270  
Kg 10

### Option - AM86/SR Safety Return Feature



Safety Return allows the slowed down rewinding of the hoses, avoiding dangerous blowbacks in case of the operator loses their grip on the hose.

Safety Return is an optional braking device for Type AM86 Hose Reels.

